


STACKING S 30 V MLR - INDOOR

David Rockwell, 2024

LEUCOS

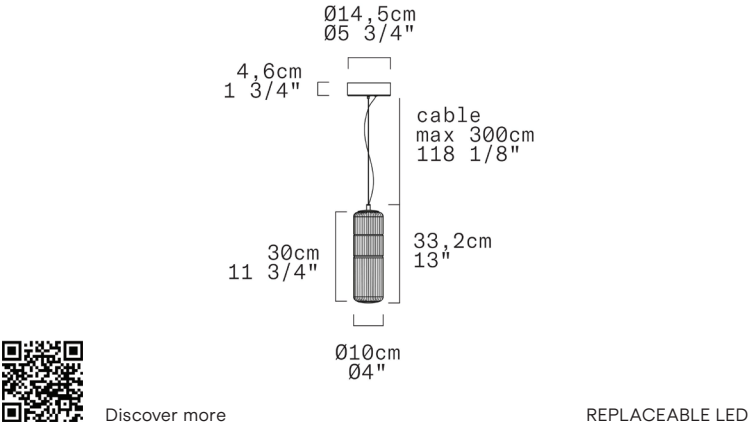

Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013557 0013558
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013882 0013883
Amber Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014618/MA 0014619/MA
Amber Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014620/MA 0014621/MA

Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013559 0013560
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013820 0013821
Amber Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014638/MA 0014639/MA
Amber Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014640/MA 0014641/MA

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information