


STACKING S 30 V MLR VU - INDOOR

David Rockwell, 2025

LEUCOS



Discover more

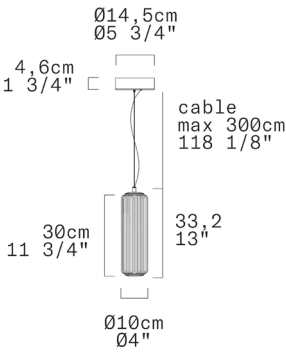

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm H30cm [Ø4" H11 3/4"] Canopy: Ø14,5cm H4,6cm [Ø5 3/4" H1 3/4"] Cable lenght: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 6,25W (total) 718 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 6,25W (total) 687 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	CE IP20
NET WEIGHT	2,5 kg



[5]

Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014509 0014510
[6] Trasparent Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014513 0014514
Amber Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014509/MA 0014510/MA
Amber Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014513/MA 0014514/MA

Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014533 0014534
[6] Trasparent Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014637 0014638
Amber Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014533/MA 0014534/MA
Amber Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014637/MA 0014638/MA

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information