


STACKING S 90 V RIG - INDOOR

David Rockwell, 2024

LEUCOS



Discover more

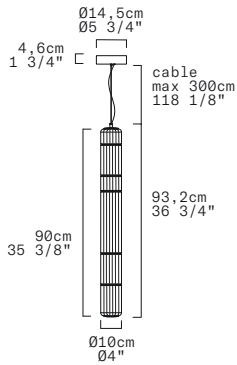

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm H90cm [Ø4" 35 3/8"] Canopy: Ø14,5cm H4,6cm [Ø5 3/4" H1 3/4"] Cable lenght: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 21,25W (total) 2443 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 21,25W (total) 2337 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	CE IP 20
NET WEIGHT	5,4kg



Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013549 0013550
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013878 0013879
Amber Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013549/RA 0013550/RA
Amber Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013878/RA 0013879/RA

Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013551 0013552
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013800 0013801
Amber Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013551/RA 0013552/RA
Amber Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013800/RA 0013801/RA

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information