


STACKING S 60 V - INDOOR

David Rockwell, 2023

LEUCOS



Discover more

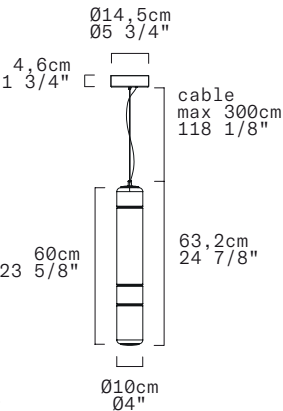

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm H60cm [Ø4" 23 5/8"] Canopy: Ø14,5cm H4,6cm [Ø5 3/4" 1 3/4"] Cable lenght: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	
NET WEIGHT	3,2kg  



 Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent + Anodized Aluminum	LED 3000K	0012362
	LED 2700K	0012389
Transparent + Matte Black Aluminum	LED 3000K	0013897
	LED 2700K	0013898
**Metallic Petrol Blue + Anodized Aluminum	LED 3000K	0013822
	LED 2700K	0013823
**Metallic Petrol Blue + Matte Black Aluminum	LED 3000K	0013824
	LED 2700K	0013825
**Metallic Titanium + Anodized Aluminum	LED 3000K	0013826
	LED 2700K	0013827
**Metallic Titanium + Matte Black Aluminum	LED 3000K	0013828
	LED 2700K	0013829

****ON REQUEST: PVD METALIZED TREATMENT**
MINIMUM ORDER QUANTITY 4 PCS PER COLOR

 Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent + Anodized Aluminum	LED 3000K	0013259
	LED 2700K	0013260
Transparent + Matte Black Aluminum	LED 3000K	0013899
	LED 2700K	0013900
**Metallic Petrol Blue + Anodized Aluminum	LED 3000K	0013734
	LED 2700K	0013735
**Metallic Petrol Blue + Matte Black Aluminum	LED 3000K	0013738
	LED 2700K	0013739
**Metallic Titanium + Anodized Aluminum	LED 3000K	0013742
	LED 2700K	0013743
**Metallic Titanium + Matte Black Aluminum	LED 3000K	0013746
	LED 2700K	0013747

****ON REQUEST: PVD METALIZED TREATMENT**
MINIMUM ORDER QUANTITY 4 PCS PER COLOR

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information