


STACKING S 60 V RIG - INDOOR

David Rockwell, 2024

LEUCOS



Discover more

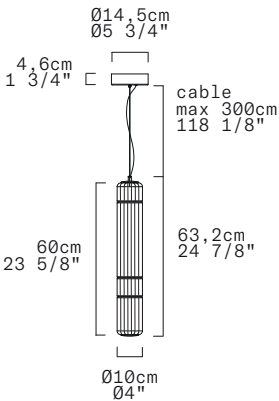

REPLACEABLE LED



Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013553 0013554
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013880 0013881
Amber Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013553/RA 0013554/RA
Amber Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013880/RA 0013881/RA

Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013555 0013556
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013810 0013811
Amber Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013555/RA 0013556/RA
Amber Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013810/RA 0013811/RA

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information