


STACKING P-PL 60 MLR

David Rockwell, 2025


LEUCOS



Discover more



TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm H62cm [Ø4" H24 2/8"] Depth: 14cm [5 1/2"]
LIGHT SOURCE	5XLED STRIP 24V 13,75W total 1581lm nominal 3000K CRI≥90 5XLED STRIP 24V 13,75W total 1512lm nominal 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	 
NET WEIGHT	3,1 Kg
NOTE	Can be installed vertically and horizontally

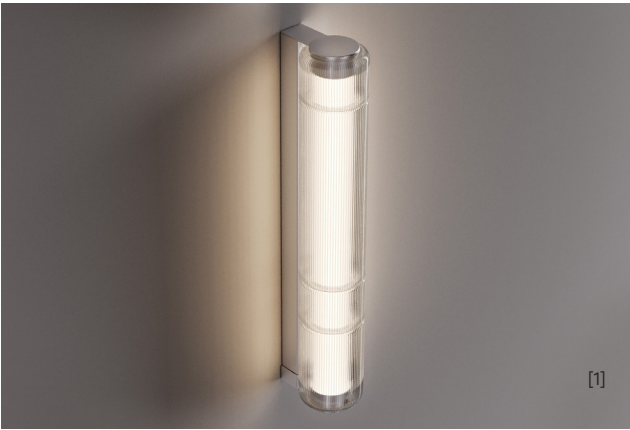

DIMMING PROTOCOL	Push-dim; Dali	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
[1] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014107 0014106
[2] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014109 0014108
Amber Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014107/MA 0014106/MA
Amber Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014109/MA 0014108/MA