


STACKING S 120 H MLR - INDOOR

David Rockwell, 2023


LEUCOS

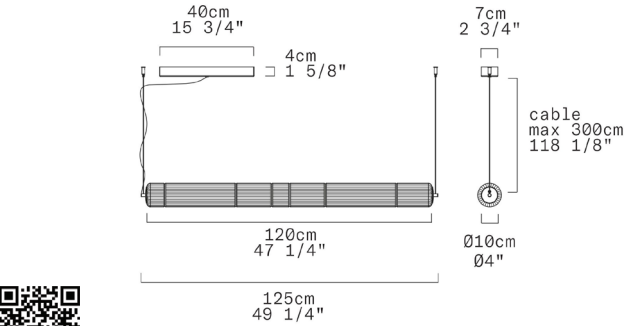

Discover more

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm L120cm [Ø4" 47 1/4"] Canopy: 40cm x 7cm x H4cm [15 3/4" x 2 3/4" x H1 5/8"] Cable lenght: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 28,75W (total) 3306 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 28,75W (total) 3162 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	CE IP20
NET WEIGHT	7,1 kg

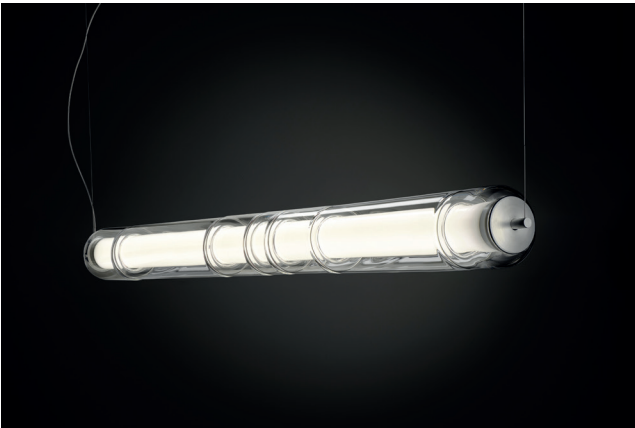

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014626 0014627
Transparent Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014628 0014629
Amber Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014626/MA 0014627/MA
Amber Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014628/MA 0014629/MA

**Class 3 version installation with remote driver
(supplied without canopy & driver)**

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0014646 0014647
Transparent + Matte Black Aluminum	LED 3000K LED 2700K	0014648 0014649
Amber Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014646/MA 0014647/MA
Amber Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014648/MA 0014649/MA

****ON REQUEST: PVD METALIZED TREATMENT**
MINIMUM ORDER QUANTITY 2 PCS PER COLOR

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information