
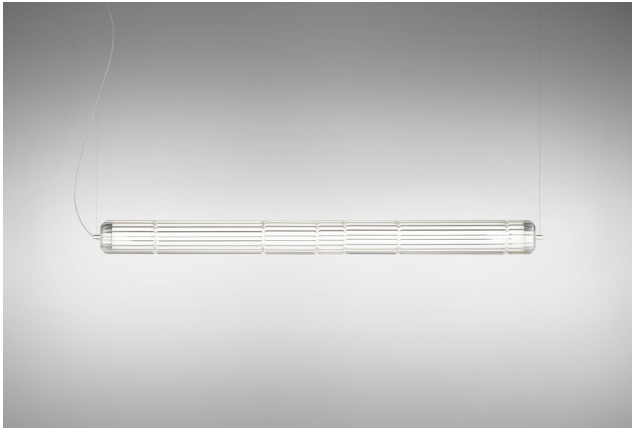


STACKING S 120 H RIG - INDOOR

David Rockwell, 2024

LEUCOS

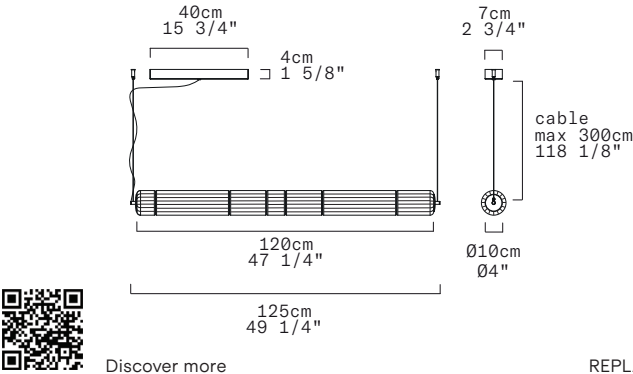

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm L120cm [Ø4" 47 1/4"] Canopy: 40cm x 7cm x H4cm [15 3/4" x 2 3/4" x H1 5/8"] Cable lenght: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 28,75W (total) 3306 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 28,75W (total) 3162 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	CE IP 20
NET WEIGHT	7,1 kg

Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Millerighe + Anodized Aluminum	LED 3000K	0014626
	LED 2700K	0014627
Transparent Millerighe + Matte Black Aluminum	LED 3000K	0014628
	LED 2700K	0014629
Amber Millerighe + Anodized Aluminum	LED 3000K	0013545/RA
	LED 2700K	0013546/RA
Amber Millerighe + Matte Black Aluminum	LED 3000K	0013876/RA
	LED 2700K	0013877/RA

Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent + Anodized Aluminum	LED 3000K	0014646
	LED 2700K	0014647
Transparent + Matte Black Aluminum	LED 3000K	0014648
	LED 2700K	0014649
Amber Millerighe + Anodized Aluminum	LED 3000K	0013547/RA
	LED 2700K	0013548/RA
Amber Millerighe + Matte Black Aluminum	LED 3000K	0013890/RA
	LED 2700K	0013891/RA

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information