


STACKING S 180 H MLR - INDOOR

David Rockwell, 2024


LEUCOS

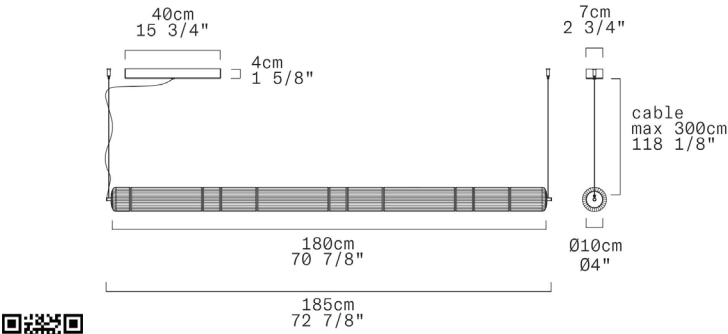

Discover more

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm L180cm [Ø4" 70 7/8"] Canopy: 40cm x 7cm x H4cm [15 3/4" x 2 3/4" x H1 5/8"] Cable lenght: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 43,75W (total) 5031 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 43,75W (total) 4812 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	CE IP 20
NET WEIGHT	12,3 kg

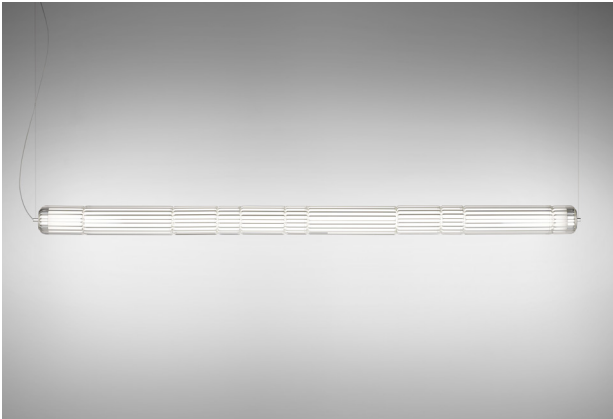

Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014622 0014623
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0014624 0014625
Amber Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014622/MA 0014623/MA
Amber Rigadin + Matte Black	LED 3000K LED 2700K	0014624/MA 0014625/MA

Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014642 0014643
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0014644 0014645
Amber Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014642/MA 0014643/MA
Amber Millerighe + Matte Black	LED 3000K LED 2700K	0014644/MA 0014645/MA

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information