


STACKING P-PL 60 - INDOOR

David Rockwell, 2025



Discover more

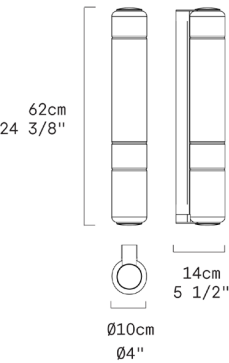

REPLACEABLE LED

TECHNICAL SHEET	
TYPE	Wall/Ceiling
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Anodized or painted aluminum
DIMENSIONS	Diffuser: [Ø4" H24 3/8"] Ø10cm H62cm Depth: [5 1/2"] 14cm
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION
NET WEIGHT	7 lbs
NOTE:	Can be installed vertically and horizontally

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0014135 0014134		
Transparent + Matte Black Aluminum	LED 3000K LED 2700K	0014137 0014136		
**Metallic Petrol Blue + Anodized Aluminum	LED 3000K LED 2700K	0014256 0014257		
**Metallic Petrol Blue + Matte Black Aluminum	LED 3000K LED 2700K	0014258 0014259		
**Metallic Titanium + Anodized Aluminum	LED 3000K LED 2700K	0014260 0014261		
**Metallic Titanium + Matte Black Aluminum	LED 3000K LED 2700K	0014262 0014263		


****ON REQUEST:** PVD METALIZED TREATMENT
MINIMUM ORDER QUANTITY 4 PCS PER COLOR

STACKING P-PL 60 RIG

David Rockwell, 2025

North America

LEUCOS

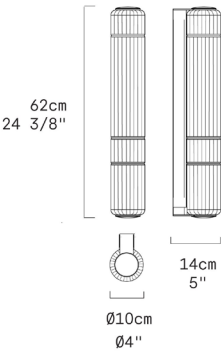

TECHNICAL SHEET	
MATERIALS	Diffuser: Rigadin Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H24 3/8"] Ø10cm H62cm Depth: [5 1/2"] 14cm
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION
NET WEIGHT	7,7 lbs 
NOTE	Can be installed vertically and horizontally

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[1] Trasparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014139 0014138		
Trasparent Rigadin + Matte Black	LED 3000K LED 2700K	0014141 0014140		
Amber Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014139/RA 0014138/RA		
Amber Rigadin + Matte Black	LED 3000K LED 2700K	0014141/RA 0014140/RA		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

<https://www.leucos.com/en-us/info.us@leucos.com>


Tel +1 (732) 225-0010

STACKING P-PL 60 RIG VU

David Rockwell, 2025

North America

LEUCOS

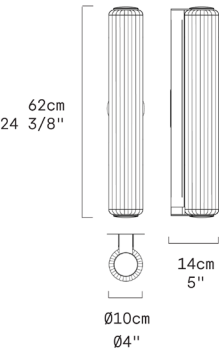

TECHNICAL SHEET	
MATERIALS	Diffuser: Rigadin Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H24 3/8"] Ø10cm H62cm Depth: [5 1/2"] 14cm
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION
NET WEIGHT	7,7 lbs 
NOTE	Can be installed vertically and horizontally



DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[1] Trasparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014143 0014142		
[2] Trasparent Rigadin + Matte Black	LED 3000K LED 2700K	0014145 0014144		
Amber Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014143/RA 0014142/RA		
Amber Rigadin + Matte Black	LED 3000K LED 2700K	0014145/RA 0014144/RA		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information


HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

<https://www.leucos.com/en-us/info.us@leucos.com>

Tel +1 (732) 225-0010

STACKING P-PL 60 MLR

David Rockwell, 2025

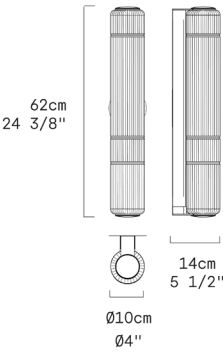

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
	Diffuser: [Ø4" H24 3/8"] Ø10cm H62cm Depth: [5 1/2"] 14cm
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION
NET WEIGHT	6.85 lbs 
NOTE	Can be installed vertically and horizontally


PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

North America

LEUCOS

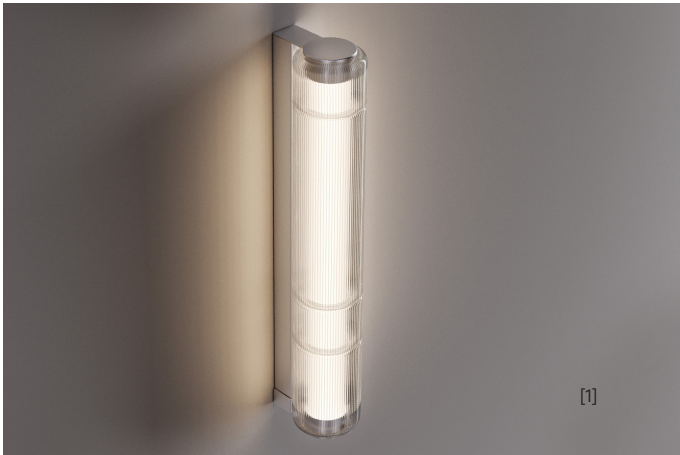


DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014147 0014146		
Transparent Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014149 0014148		
Amber Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014147/MA 0014146/MA		
Amber Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014149/MA 0014148/MA		

<https://www.leucos.com/en-us/info.us@leucos.com>

Tel +1 (732) 225-0010

STACKING P-PL 60 MLR VU

David Rockwell, 2025

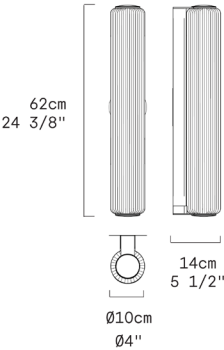

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H24 3/8"] Ø10cm H62cm Depth: [5 1/2"] 14cm
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION
NET WEIGHT	6,85 lbs 
NOTE	Can be installed vertically and horizontally

North America

LEUCOS



DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Millerighe Single Glass + Anodized Aluminum	LED 3000K LED 2700K	0014151 0014150		
Transparent Millerighe Single Glass + Matte Black Aluminum	LED 3000K LED 2700K	0014153 0014152		
Amber Millerighe Single Glass + Anodized Aluminum	LED 3000K LED 2700K	0014151/MA 0014150/MA		
Amber Millerighe Single Glass + Matte Black Aluminum	LED 3000K LED 2700K	0014153/MA 0014152/MA		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

<https://www.leucos.com/en-us/>
info.us@leucos.com

Tel +1 (732) 225-0010