LEUCOS

STACKING P-PL 60 - INDOOR

David Rockwell, 2025

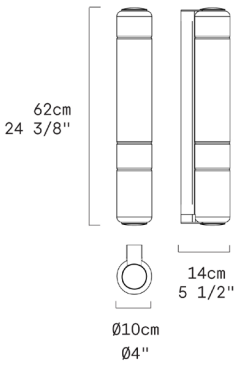

Discover more

REPLACEABLE LED

TECHNICAL SHEET	
TYPE	Wall/Ceiling
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Anodized or painted aluminum
DIMENSIONS	Diffuser: [Ø4" H24 3/8"] Ø10cm H62cm Depth: [5 1/2"] 14cm
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION
NET WEIGHT	7 lbs
NOTE:	Can be installed vertically and horizontally

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0014135 0014134		
Transparent + Matte Black Aluminum	LED 3000K LED 2700K	0014137 0014136		
**Metallic Petrol Blue + Anodized Aluminum	LED 3000K LED 2700K	0014256 0014257		
**Metallic Petrol Blue + Matte Black Aluminum	LED 3000K LED 2700K	0014258 0014259		
**Metallic Titanium + Anodized Aluminum	LED 3000K LED 2700K	0014260 0014261		
**Metallic Titanium + Matte Black Aluminum	LED 3000K LED 2700K	0014262 0014263		

ON REQUEST: PVD METALIZED TREATMENT

MINIMUM ORDER QUANTITY 4 PCS PER COLOR

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information