


STACKING P-PL 60 MLR

David Rockwell, 2025

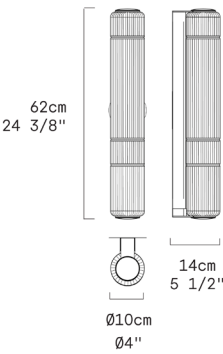

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
	Diffuser: [Ø4" H24 3/8"] Ø10cm H62cm Depth: [5 1/2"] 14cm
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION
NET WEIGHT	6.85 lbs 
NOTE	Can be installed vertically and horizontally


PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

North America

LEUCOS

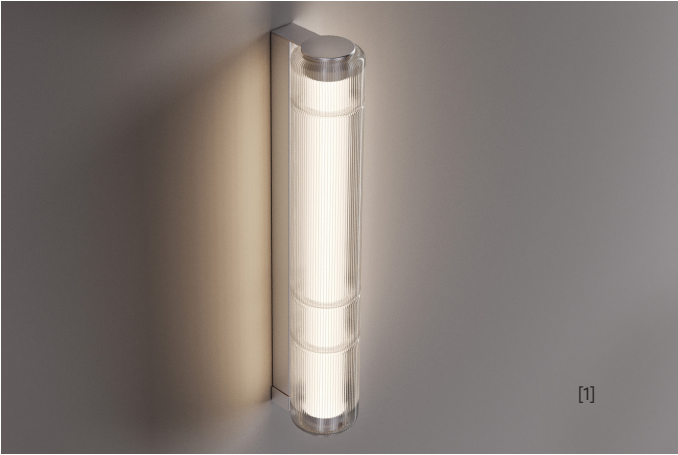

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014147 0014146		
Transparent Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014149 0014148		
Amber Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014147/MA 0014146/MA		
Amber Millerighe + Matte Black Aluminum	LED 3000K LED 2700K	0014149/MA 0014148/MA		

<https://www.leucos.com/en-us/info.us@leucos.com>

Tel +1 (732) 225-0010