


STACKING P-PL 60 MLR VU

David Rockwell, 2025

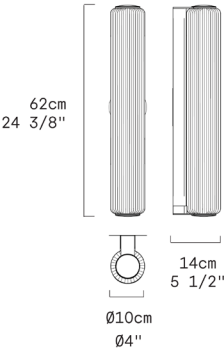

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H24 3/8"] Ø10cm H62cm Depth: [5 1/2"] 14cm
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION
NET WEIGHT	6,85 lbs 
NOTE	Can be installed vertically and horizontally

North America

LEUCOS



DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Millerighe Single Glass + Anodized Aluminum	LED 3000K LED 2700K	0014151 0014150		
Transparent Millerighe Single Glass + Matte Black Aluminum	LED 3000K LED 2700K	0014153 0014152		
Amber Millerighe Single Glass + Anodized Aluminum	LED 3000K LED 2700K	0014151/MA 0014150/MA		
Amber Millerighe Single Glass + Matte Black Aluminum	LED 3000K LED 2700K	0014153/MA 0014152/MA		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

<https://www.leucos.com/en-us/>
info.us@leucos.com

Tel +1 (732) 225-0010