


STACKING P-PL 60 RIG VU

David Rockwell, 2025

North America

LEUCOS

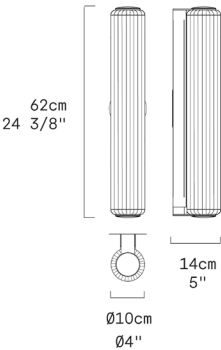

TECHNICAL SHEET	
MATERIALS	Diffuser: Rigadin Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H24 3/8"] Ø10cm H62cm Depth: [5 1/2"] 14cm
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION
NET WEIGHT	7,7 lbs 
NOTE	Can be installed vertically and horizontally

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[1] Trasparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014143 0014142		
[2] Trasparent Rigadin + Matte Black	LED 3000K LED 2700K	0014145 0014144		
Amber Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014143/RA 0014142/RA		
Amber Rigadin + Matte Black	LED 3000K LED 2700K	0014145/RA 0014144/RA		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

<https://www.leucos.com/en-us/info.us@leucos.com>

Tel +1 (732) 225-0010