


AELLA T 54 - INDOOR

Toso & Massari, 1968



Discover more

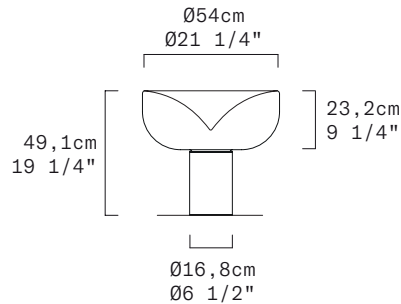

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Blown Glass Structure: Metal
DIMENSIONS	Diffuser: [Ø21 1/4" H9 1/4"] Ø54 cm H23,2 cm Base: [Ø6 1/2" H10 / 14"] Ø16,8 cm H25,9 cm Cable lenght: [78 3/4"] 200 cm
LIGHT SOURCE	100-240Vac 50-60Hz LED 1 X 26,6W 4060lm (nominal) 3000K CRI≥90 LED 1 X 26,6W 3808lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Dimmer on cord
MARKING	DRY LOCATION
NET WEIGHT	36,26 Ibs

North America

LEUCOS



DIMMING PROTOCOL	Dimmer on cord			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[1] Transparent with White Spot + Matte White	LED 3000K LED 2700K	0012980 0012981		
[2] Transparent with White Spot + Matte Black	LED 3000K LED 2700K	0012982 0012983		
[3] Transparent with White Spot + Matte Bronze	LED 3000K LED 2700K	0012984 0012985		
[4] Shaded Burgundy + Matte White	LED 3000K LED 2700K	0012986 0012987		
[5] Shaded Burgundy + Matte Black	LED 3000K LED 2700K	0012988 0012989		
[6] Shaded Burgundy + Matte Bronze	LED 3000K LED 2700K	0012990 0012991		
[7] White Shaded Pink + Matte White	LED 3000K LED 2700K	0014284 0014285		
[8] White Shaded Pink + Matte Black	LED 3000K LED 2700K	0014286 0014287		
[9] White Shaded Pink + Matte Bronze	LED 3000K LED 2700K	0014288 0014289		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

<https://www.leucos.com/en-us/>
info.us@leucos.com


Tel +1 (732) 225-0010

AELLA T 45 - INDOOR

Toso & Massari, 2023



Discover more



REPLACEABLE LED

TECHNICAL SHEET

MATERIALS Diffuser: Blown Glass
Structure: Metal

DIMENSIONS Diffuser: [Ø17 3/4" H7 1/2"] Ø45 cm H19,3 cm
Base: [Ø5 1/2" H8 3/8"] Ø14 cm H21,3 cm
Cable length: [78 3/4"] 200 cm

LIGHT SOURCE 100-240Vac 50-60Hz
LED 1 X 14,2W 2219 lm (nominal) 3000K CRI≥90
LED 1 X 14,2W 2118 lm (nominal) 2700K CRI≥90

DIMMING PROTOCOL Dimmer on cord

MARKING DRY LOCATION

NET WEIGHT 18,30 Ibs

North America

LEUCOS



DIMMING PROTOCOL	Dimmer on cord			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[1] Transparent with White Spot + Matte White	LED 3000K LED 2700K	0012962 0012963		
[2] Transparent with White Spot + Matte Black	LED 3000K LED 2700K	0012964 0012965		
[3] Transparent with White Spot + Matte Bronze	LED 3000K LED 2700K	0012966 0012967		
[4] Shaded Burgundy + Matte White	LED 3000K LED 2700K	0012968 0012969		
[5] Shaded Burgundy + Matte Black	LED 3000K LED 2700K	0012970 0012971		
[6] Shaded Burgundy + Matte Bronze	LED 3000K LED 2700K	0012972 0012973		
[7] White Shaded Pink + Matte White	LED 3000K LED 2700K	0014278 0014279		
[8] White Shaded Pink + Matte Black	LED 3000K LED 2700K	0014280 0014281		
[9] White Shaded Pink + Matte Bronze	LED 3000K LED 2700K	0014282 0014283		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information


HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

<https://www.leucos.com/en-us/>
info.us@leucos.com

Tel +1 (732) 225-0010

AELLA T 30 - INDOOR

Toso & Massari, 2017



Discover more

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Blown Glass Structure: Metal
DIMENSIONS	Diffuser: [Ø11 3/4" H5"] Ø30 cm H12,9 cm Base: [Ø4" H5 1/8"] Ø10cm H14,7 cm Cable lenght: [78 3/4"] 200 cm
LIGHT SOURCE	100-240Vac 50-60Hz LED 1 X 11,9W 1635 lm (nominal) 3000K CRI≥90 LED 1 X 11,9W 1535 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Dimmer on cord
MARKING	DRY LOCATION
NET WEIGHT	7,27 lbs

North America

LEUCOS



DIMMING PROTOCOL	Dimmer on cord			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[1] Transparent with White Spot + Matte White	LED 3000K LED 2700K	0012944 0012945		
[2] Transparent with White Spot + Matte Black	LED 3000K LED 2700K	0012946 0012947		
[3] Transparent with White Spot + Matte Bronze	LED 3000K LED 2700K	0012948 0012949		
[4] Shaded Burgundy + Matte White	LED 3000K LED 2700K	0012950 0012951		
[5] Shaded Burgundy + Matte Black	LED 3000K LED 2700K	0012952 0012953		
[6] Shaded Burgundy + Matte Bronze	LED 3000K LED 2700K	0012954 0012955		
[7] White Shaded Pink + Matte White	LED 3000K LED 2700K	0014272 0014273		
[8] White Shaded Pink + Matte Black	LED 3000K LED 2700K	0014274 0014275		
[9] White Shaded Pink + Matte Bronze	LED 3000K LED 2700K	0014276 0014277		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US


<https://www.leucos.com/en-us/>
info.us@leucos.com

Tel +1 (732) 225-0010

AELLA T 45 OPENWORKED - INDOOR

Toso & Massari, 2024

Special Edition

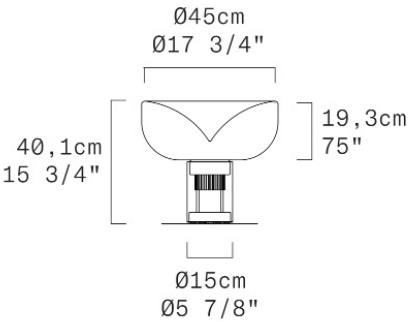

Discover more

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Blown Glass Structure: Metal + Anodized aluminium and Natural Copper Rods Base: Borosilicate Glass
DIMENSIONS	Diffuser: [Ø17 3/4" H75"] Ø45 cm H19,3cm Base: [Ø5 7/8" H8 1/4"] Ø15cm H20,8 cm Cable lenght: [78 3/4"] 200 cm
LIGHT SOURCE	LED 1 X 14,3W 2202 lm (nominal) 3000K CRI≥90 LED 1 X 14,3W 2116 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Dimmer on cord
MARKING	DRY LOCATION
NET WEIGHT	17,63 lbs

North America

LEUCOS



DIMMING PROTOCOL	Dimmer on cord			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Trasparent with White spot + Transparent Glass + Anodized Aluminium and Natural Copper Rods	LED 3000K	0013401		
	LED 2700K	0013402		

ON REQUEST WITH PERSONALIZED PLAQUE

DIMMING PROTOCOL	Dimmer on cord			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Trasparent with White spot + Transparent Glass + Anodized Aluminium and Natural Copper Rods	LED 3000K	0013888		
	LED 2700K	0013887		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information