


STACKING S 120 H RIG - INDOOR

David Rockwell, 2024

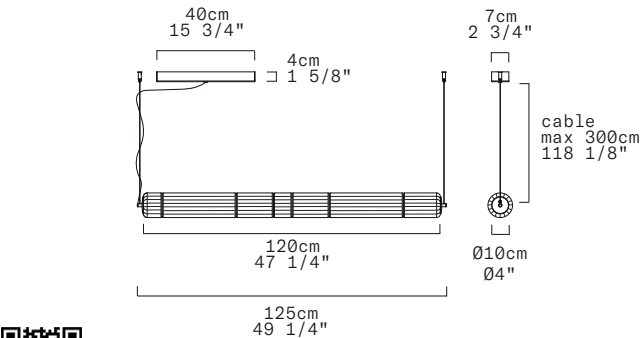

Discover more

REPLACEABLE LED

|                  |                                                                                                                                   |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| TECHNICAL SHEET  |                                                                                                                                   |
| MATERIALS        | Diffuser: Blown Borosilicate Glass<br>Structure: Aluminum                                                                         |
| DIMENSIONS       | Diffuser: [Ø4" L47 1/4"] Ø10cm L120cm<br>Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm<br>Cable lenght: [118 1/8"] 300cm |
| CANOPY           | Matte White                                                                                                                       |
| LIGHT SOURCE     | 5 X LED STRIP 28,75W (total) 2523 lm (delivered) 3000K CRI≥90<br>5 X LED STRIP 28,75W (total) 2472 lm (delivered) 2700K CRI≥90    |
| DIMMING PROTOCOL | 0/1-10V; Phase cut                                                                                                                |
| MARKING          | DRY LOCATION                                   |
| NET WEIGHT       | 15,65 lbs                                                                                                                         |

|                |  |
|----------------|--|
| PROJECT NAME   |  |
| SPECIFIER NAME |  |

We reserve the right to change our product specifications.  
Please visit [www.leucos.com](http://www.leucos.com) for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version  
(supplied with canopy & driver)

|                                            |                        |                          |     |      |
|--------------------------------------------|------------------------|--------------------------|-----|------|
| DIMMING PROTOCOL                           | 0/1-10V; Phase cut     |                          |     |      |
| FINISH (DIFFUSER + STRUCTURE)              | SOURCE                 | CODE                     | QTY | TYPE |
| Transparent Rigadin + Anodized Aluminum    | LED 3000K<br>LED 2700K | 0013575<br>0013576       |     |      |
| Transparent Rigadin + Matte Black Aluminum | LED 3000K<br>LED 2700K | 0013916<br>0013917       |     |      |
| Amber Rigadin + Anodized Aluminium         | LED 3000K<br>LED 2700K | 0013575/RA<br>0013576/RA |     |      |
| Amber Rigadin + Matte Black Aluminium      | LED 3000K<br>LED 2700K | 0013916/RA<br>0013917/RA |     |      |