


STACKING S 180 H - INDOOR

David Rockwell, 2023

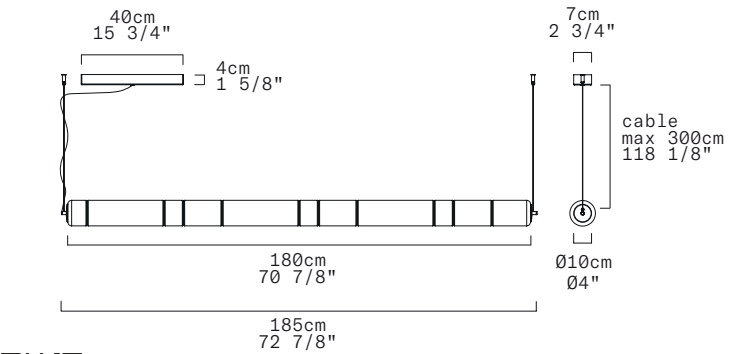

Discover more

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" L70 7/8"] Ø10cm L180cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 43,75W (total) 3830 lm (delivered) 3000K CRI≥90 5 X LED STRIP 43,75W (total) 3539 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	22,04 lbs


PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

North America

LEUCOS

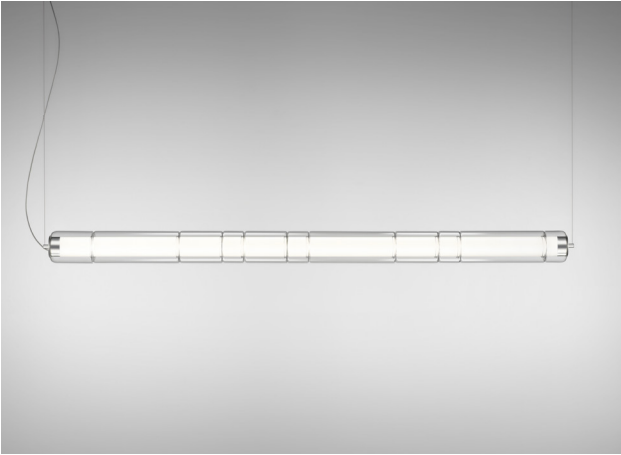

100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0012408 0012409		
Transparent + Matte Black Aluminum	LED 3000K LED 2700K	0013872 0013905		
**Metallic Petrol Blue + Anodized Aluminum	LED 3000K LED 2700K	0013696 0013697		
**Metallic Petrol Blue + Matte Black Aluminum	LED 3000K LED 2700K	0013698 0013699		
**Metallic Titanium + Anodized Aluminum	LED 3000K LED 2700K	0013700 0013701		
**Metallic Titanium + Matte Black Aluminum	LED 3000K LED 2700K	0013702 0013703		

**ON REQUEST: PVD METALIZED TREATMENT
MINIMUM ORDER QUANTITY 1 PCS PER COLOR

<https://www.leucos.com/en-us/info.us@leucos.com>

Tel +1 (732) 225-0010