


STACKING S 180 H NAKED - INDOOR

David Rockwell, 2023

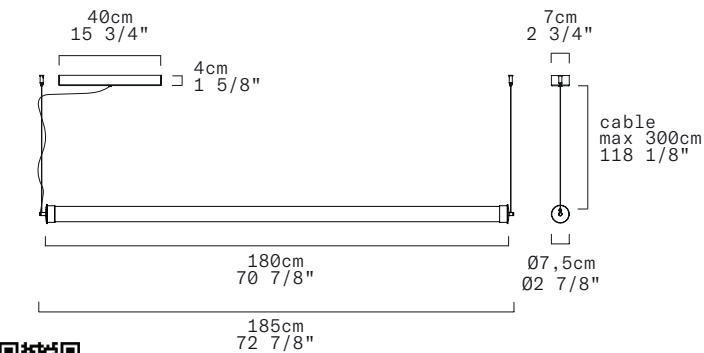

Discover more

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Borosilicate Glass Structure: Aluminium
DIMENSIONS	Diffuser: [2 7/8" L70 7/8"] Ø7,5cm L180cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 43,75W (total) 3924 lm (delivered) 3000K CRI≥90 5 X LED STRIP 43,75W (total) 3845 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	11,02 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0012501		
	LED 2700K	0012502		

24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0013383		
	LED 2700K	0013384		