


STACKING S 30 V MLR - INDOOR

David Rockwell, 2025

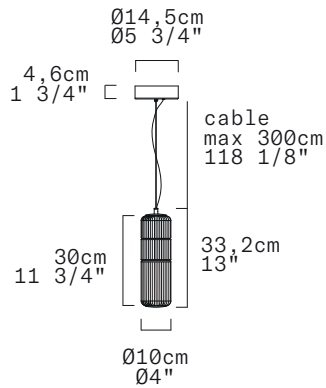

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H11 3/4"] Ø10cm H30cm Canopy: [Ø5 3/4" H1 3/4"] Ø14,5cm H4,6cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 6,25W (total) 541 lm (delivered) 3000K CRI≥90 5 X LED STRIP 6,25W (total) 530 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION
NET WEIGHT	6 lbs 
	Round Cluster Canopy 55 Radial Cluster Canopy 33

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[5] Trasparent Millerighe + Anodized Aluminium	LED 3000K LED 2700K	0014658 0014659		
[6] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014660 0014661		
Amber Rigadin + Anodized Aluminium	LED 3000K LED 2700K	0014658/MA 0014659/MA		
Amber Rigadin + Matte Black Aluminium	LED 3000K LED 2700K	0014660/MA 0014661/MA		

<https://www.leucos.com/en-us/>
info.us@leucos.com

Tel +1 (732) 225-0010