


STACKING S 60 V - INDOOR

David Rockwell, 2023



Discover more

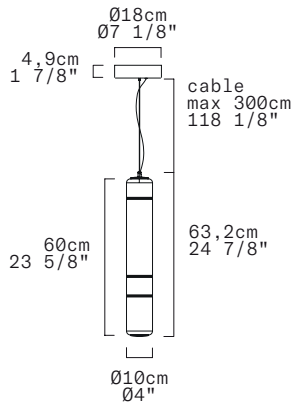

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H23 5/8"] Ø10cm H60cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 13,75W (total) 1218 lm (delivered) 3000K CRI≥90 5 X LED STRIP 13,75W (total) 1186 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	7,05 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0012414 0012415		
Transparent + Matte Black Aluminum	LED 3000K LED 2700K	0013910 0013911		
**Metallic Petrol Blue + Anodized Aluminum	LED 3000K LED 2700K	0013732 0013733		
**Metallic Petrol Blue + Matte Black Aluminum	LED 3000K LED 2700K	0013736 0013737		
**Metallic Titanium + Anodized Aluminum	LED 3000K LED 2700K	0013740 0013741		
**Metallic Titanium + Matte Black Aluminum	LED 3000K LED 2700K	0013744 0013745		

**ON REQUEST: PVD METALIZED TREATMENT
MINIMUM ORDER QUANTITY 4 PCS PER COLOR