


STACKING S 60 V RIG VU - INDOOR

David Rockwell, 2025

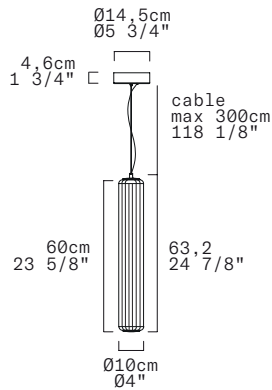

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Rigadin Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" 23 5/8"] Ø10cm H60cm Canopy: [Ø5 3/4" 1 3/4"] Ø14,5cm H4,6cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 13,75W (total) 1218 lm (delivered) 3000K CRI≥90 5 X LED STRIP 13,75W (total) 1186 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION 
NET WEIGHT	7 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

North America

LEUCOS



[3]

100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[3] Trasparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014515 0014516		
[4] Trasparent Rigadin + Matte Black	LED 3000K LED 2700K	0014519 0014520		
Amber Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014515/RA 0014516/RA		
Ambra Rigadin + Matte Black	LED 3000K LED 2700K	0014519/RA 0014520/RA		

<https://www.leucos.com/en-us/>
info.us@leucos.com

Tel +1 (732) 225-0010