


STACKING S 90 V - INDOOR

David Rockwell, 2023



Discover more

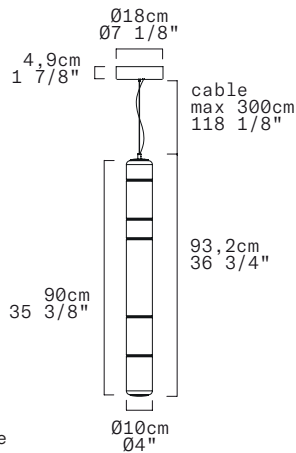

REPLACEABLE LED


TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" h35 3/8"] Ø10cm H90cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 21,25W (total) 1895 lm (delivered) 3000K CRI≥90 5 X LED STRIP 21,25W (total) 1857 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	9,48 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS

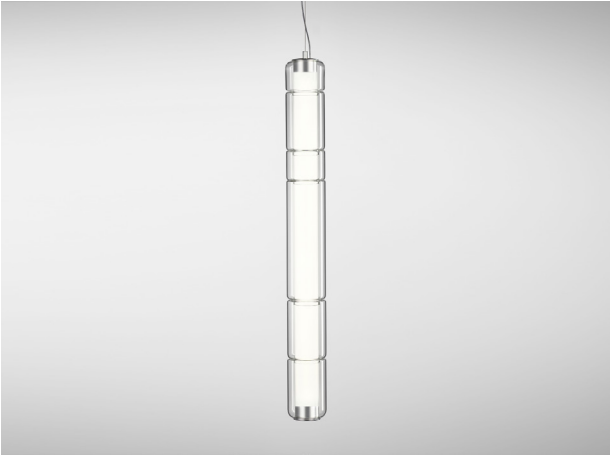

100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0012412		
	LED 2700K	0012413		
Transparent + Matte Black Aluminum	LED 3000K	0013908		
	LED 2700K	0013909		
**Metallic Petrol Blue + Anodized Aluminum	LED 3000K	0013720		
	LED 2700K	0013721		
**Metallic Petrol Blue + Matte Black Aluminum	LED 3000K	0013722		
	LED 2700K	0013723		
**Metallic Titanium + Anodized Aluminum	LED 3000K	0013724		
	LED 2700K	0013725		
**Metallic Titanium + Matte Black Aluminum	LED 3000K	0013726		
	LED 2700K	0013727		

**ON REQUEST: PVD METALIZED TREATMENT
MINIMUM ORDER QUANTITY 2 PCS PER COLOR