STACKING S 180 H - INDOOR

David Rockwell, 2023

North America

LEUCOS

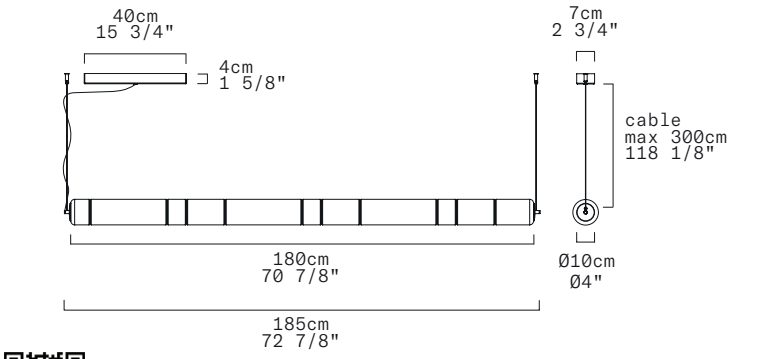

Discover more

REPLACEABLE LED

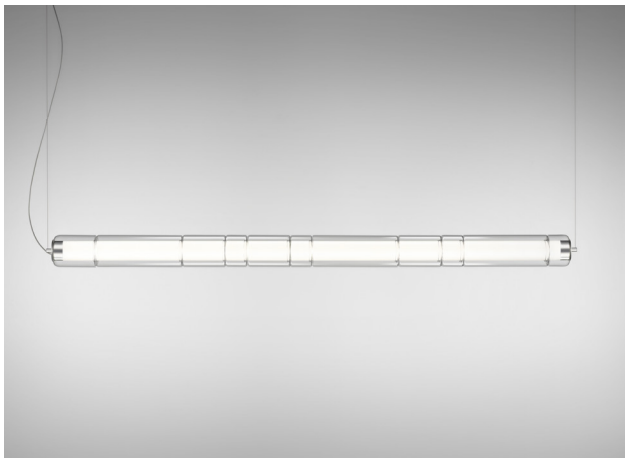

100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" L70 7/8"] Ø10cm L180cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 43,75W (total) 3830 lm (delivered) 3000K CRI≥90 5 X LED STRIP 43,75W (total) 3539 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION
NET WEIGHT	22,04 lbs

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0012408 0012409		
Transparent + Matte Black Aluminum	LED 3000K LED 2700K	0013872 0013905		
**Metallic Petrol Blue + Anodized Aluminum	LED 3000K LED 2700K	0013696 0013697		
**Metallic Petrol Blue + Matte Black Aluminum	LED 3000K LED 2700K	0013698 0013699		
**Metallic Titanium + Anodized Aluminum	LED 3000K LED 2700K	0013700 0013701		
**Metallic Titanium + Matte Black Aluminum	LED 3000K LED 2700K	0013702 0013703		

**ON REQUEST: PVD METALIZED TREATMENT
MINIMUM ORDER QUANTITY 1 PCS PER COLOR

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US
https://www.leucos.com/en-us/
info.us@leucos.com
Tel +1 (732) 225-0010

STACKING S 180 H RIG - INDOOR

David Rockwell, 2024

North America

LEUCOS

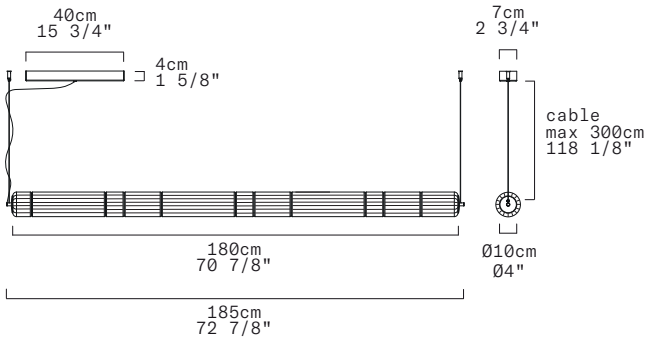

Discover more

REPLACEABLE LED

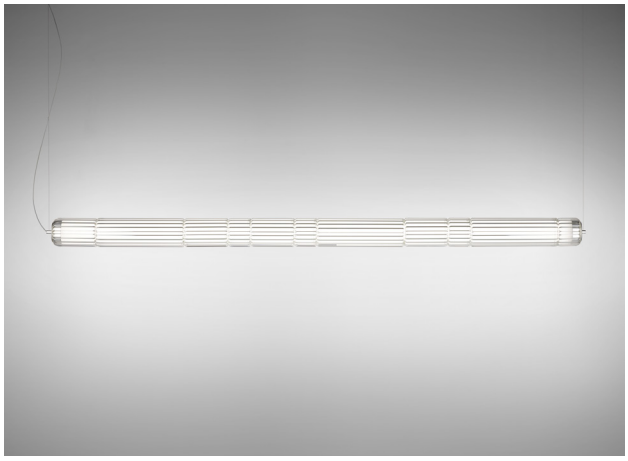

100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" L70 7/8"] Ø10cm L180cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 43,75W (total) 3830 lm (delivered) 3000K CRI≥90 5 X LED STRIP 43,75W (total) 3539 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION
NET WEIGHT	27,11 lbs

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013571 0013572		
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013914 0013915		
Amber Rigadin + Anodized Aluminium	LED 3000K LED 2700K	0013571/RA 0013572/RA		
Amber Rigadin + Matte Black Aluminium	LED 3000K LED 2700K	0013914/RA 0013915/RA		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US
https://www.leucos.com/en-us/
info.us@leucos.com
Tel +1 (732) 225-0010

STACKING S 180 H MLR - INDOOR

David Rockwell, 2025

North America

LEUCOS

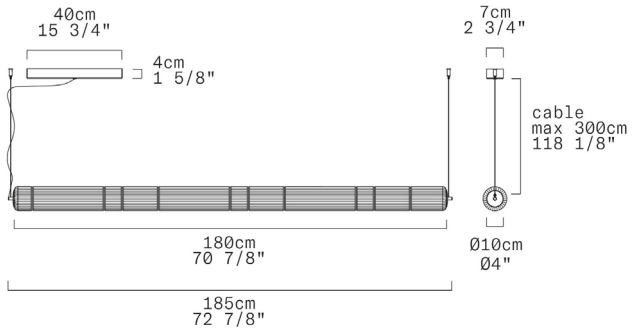

REPLACEABLE LED

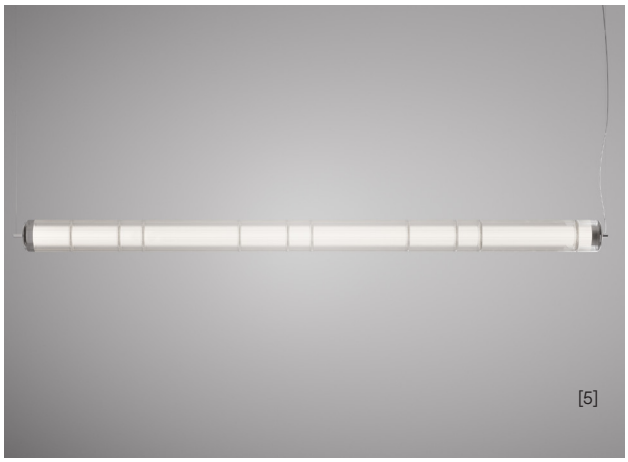

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" 70 7/8"] Ø10cm L180cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 43,75W (total) 3830 lm (delivered) 3000K CRI≥90 5 X LED STRIP 43,75W (total) 3536 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION
NET WEIGHT	27 lbs

100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014662 0014663		
[6] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014664 0014665		
Amber Millerighe + Anodized Aluminium	LED 3000K LED 2700K	0014662/MA 0014663/MA		
Amber Rigadin + Matte Black	LED 3000K LED 2700K	0014664/MA 0014665/MA		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US
https://www.leucos.com/en-us/
info.us@leucos.com
Tel +1 (732) 225-0010

STACKING S 180 H NAKED - INDOOR

David Rockwell, 2023

North America

LEUCOS

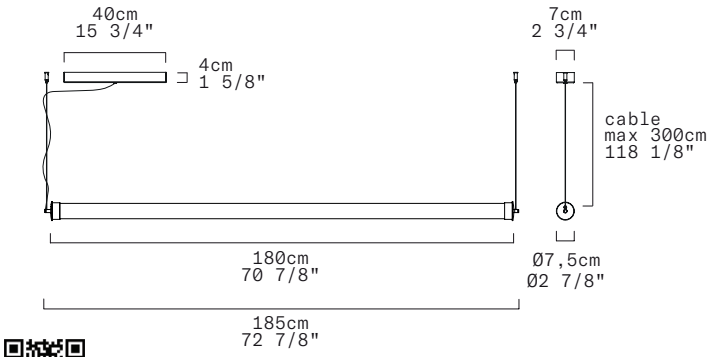

Discover more

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Borosilicate Glass Structure: Aluminium
DIMENSIONS	Diffuser: [2 7/8" L70 7/8"] Ø7,5cm L180cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 43,75W (total) 3924 lm (delivered) 3000K CRI≥90 5 X LED STRIP 43,75W (total) 3845 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION
NET WEIGHT	11,02 lbs

100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0012501 0012502		

24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0013383 0013384		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US
https://www.leucos.com/en-us/
info.us@leucos.com
Tel +1 (732) 225-0010

STACKING S 120 H - INDOOR

David Rockwell, 2023

North America

LEUCOS

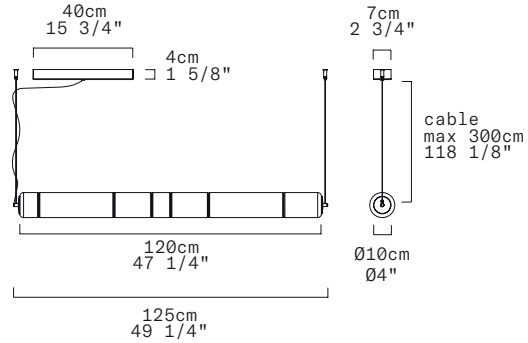

Discover more

REPLACEABLE LED

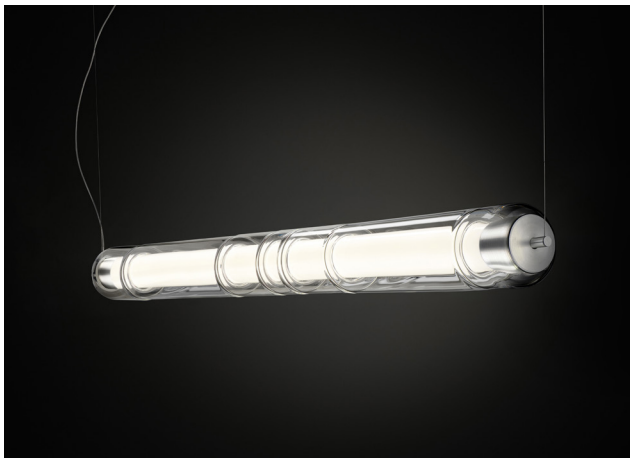

100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" L47 1/4"] Ø10cm L120cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 28,75W (total) 2523 lm (delivered) 3000K CRI≥90 5 X LED STRIP 28,75W (total) 2472 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION
NET WEIGHT	12,34 lbs

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0012410 0012411		
Transparent + Matte Black Aluminum	LED 3000K LED 2700K	0013906 0013907		
**Metallic Petrol Blue + Anodized Aluminum	LED 3000K LED 2700K	0013708 0013709		
**Metallic Petrol Blue + Matte Black Aluminum	LED 3000K LED 2700K	0013710 0013711		
**Metallic Titanium + Anodized Aluminum	LED 3000K LED 2700K	0013712 0013713		
**Metallic Titanium + Matte Black Aluminum	LED 3000K LED 2700K	0013714 0013715		

**ON REQUEST: PVD METALIZED TREATMENT
MINIMUM ORDER QUANTITY 2 PCS PER COLOR

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US
https://www.leucos.com/en-us/
info.us@leucos.com
Tel +1 (732) 225-0010

STACKING S 120 H RIG - INDOOR

David Rockwell, 2024

North America

LEUCOS

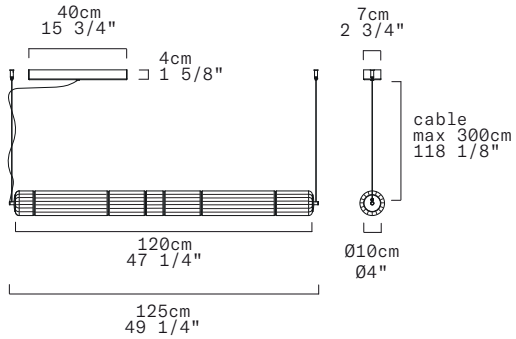

Discover more

REPLACEABLE LED

100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013575 0013576		
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013916 0013917		
Amber Rigadin + Anodized Aluminium	LED 3000K LED 2700K	0013575/RA 0013576/RA		
Amber Rigadin + Matte Black Aluminium	LED 3000K LED 2700K	0013916/RA 0013917/RA		

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" L47 1/4"] Ø10cm L120cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 28,75W (total) 2523 lm (delivered) 3000K CRI≥90 5 X LED STRIP 28,75W (total) 2472 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION
NET WEIGHT	15,65 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US
https://www.leucos.com/en-us/
info.us@leucos.com
Tel +1 (732) 225-0010

STACKING S 120 H MLR - INDOOR

David Rockwell, 2025

North America

LEUCOS

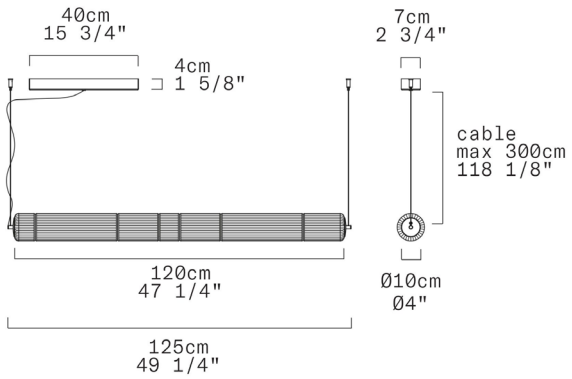

REPLACEABLE LED

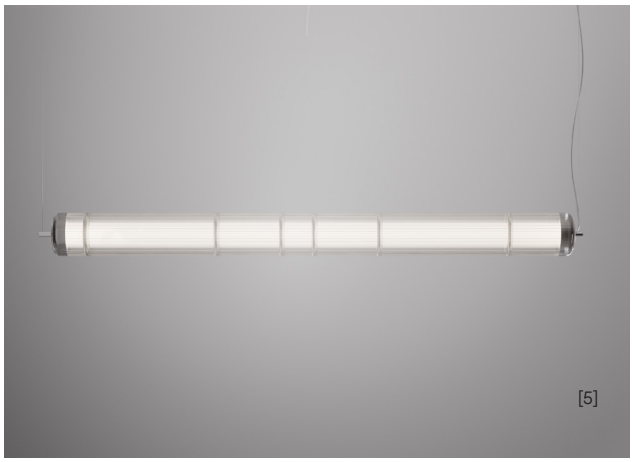

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" 47 1/4"] Ø10cm L120cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 28,75W (total) 2523 lm (delivered) 3000K CRI≥90 5 X LED STRIP 28,75W (total) 2472 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION
NET WEIGHT	15,7 lbs

100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014666 0014667		
[6] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014668 0014669		
Amber Millerighe + Anodized Aluminium	LED 3000K LED 2700K	0014666/MA 0014667/MA		
Amber Rigadin + Matte Black	LED 3000K LED 2700K	0014668/MA 0014669/MA		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US
https://www.leucos.com/en-us/
info.us@leucos.com
Tel +1 (732) 225-0010

STACKING S 120 H NAKED - INDOOR

David Rockwell, 2023

North America

LEUCOS

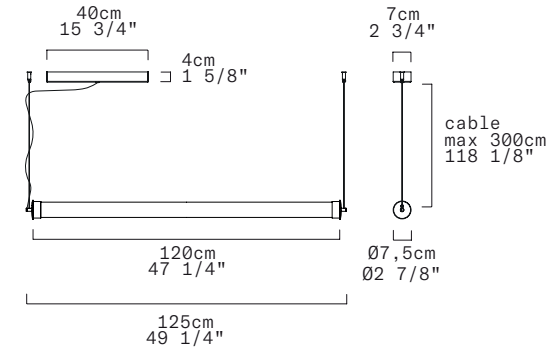

Discover more

REPLACEABLE LED

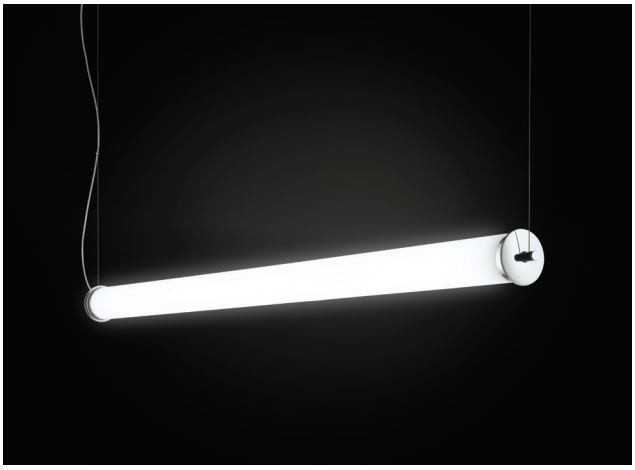

TECHNICAL SHEET	
MATERIALS	Diffuser: Polymethacrylate Structure: Aluminium
DIMENSIONS	Diffuser: [Ø2 7/8" L49 1/4"] Ø7,5cm L120cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 28,75W (total) 2585 lm (delivered) 3000K CRI≥90 5 X LED STRIP 28,75W (total) 2533 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION
NET WEIGHT	7,49 lbs

100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0012503 0012504		

24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0013385 0013386		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US
https://www.leucos.com/en-us/
info.us@leucos.com
Tel +1 (732) 225-0010