


STACKING S 90 V - INDOOR

David Rockwell, 2023



Discover more

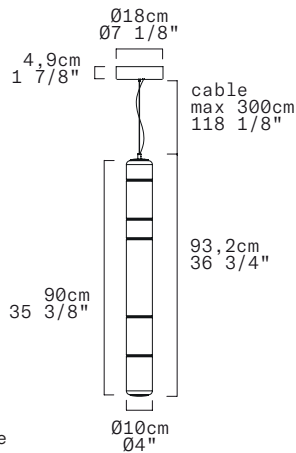

REPLACEABLE LED

TECHNICAL SHEET


MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" h35 3/8"] Ø10cm H90cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 21,25W (total) 1895 lm (delivered) 3000K CRI≥90 5 X LED STRIP 21,25W (total) 1857 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	9,48 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS

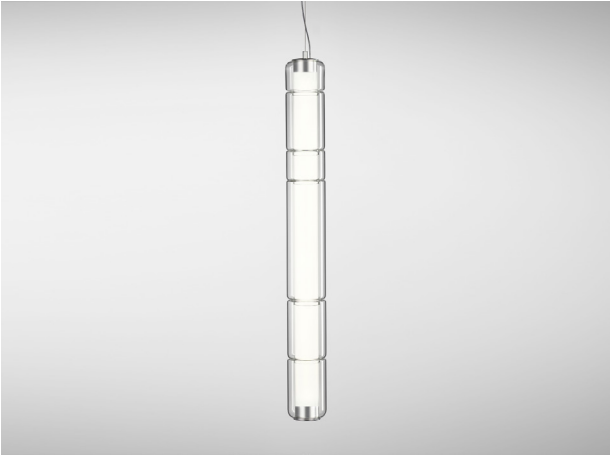

100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0012412		
	LED 2700K	0012413		
Transparent + Matte Black Aluminum	LED 3000K	0013908		
	LED 2700K	0013909		
**Metallic Petrol Blue + Anodized Aluminum	LED 3000K	0013720		
	LED 2700K	0013721		
**Metallic Petrol Blue + Matte Black Aluminum	LED 3000K	0013722		
	LED 2700K	0013723		
**Metallic Titanium + Anodized Aluminum	LED 3000K	0013724		
	LED 2700K	0013725		
**Metallic Titanium + Matte Black Aluminum	LED 3000K	0013726		
	LED 2700K	0013727		


**ON REQUEST: PVD METALIZED TREATMENT
MINIMUM ORDER QUANTITY 2 PCS PER COLOR

STACKING S 90 V RIG - INDOOR

David Rockwell, 2024



Discover more

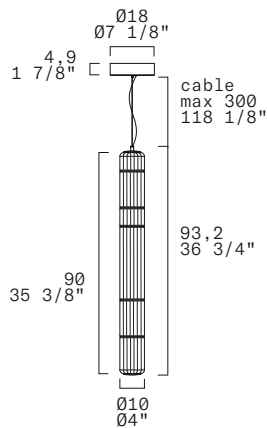

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" h35 3/8"] Ø10cm H90cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 21,25W (total) 1895 lm (delivered) 3000K CRI≥90 5 X LED STRIP 21,25W (total) 1857 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	11,90 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS




100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013579 0013580		
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013918 0013919		
Amber Rigadin + Anodized Aluminium	LED 3000K LED 2700K	0013579/RA 0013580/RA		
Amber Rigadin + Matte Black Aluminium	LED 3000K LED 2700K	0013918/RA 0013919/RA		

STACKING S 90 V MLR - INDOOR

David Rockwell, 2025

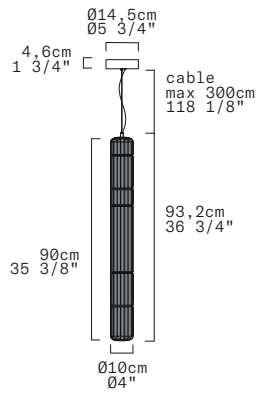

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" 35 3/8"] Ø10cm H90cm Canopy: [Ø5 3/4" H1 3/4"] Ø14,5cm H4,6cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 21,25W (total) 1895 lm (delivered) 3000K CRI≥90 5 X LED STRIP 24V 21,25W (total) 1857 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION
NET WEIGHT	12 lbs 
	Round Cluster Canopy 55 Radial Cluster Canopy 33

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)


DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[5] Trasparent Millerighe + Anodized Aluminium	LED 3000K LED 2700K	0014650 0014651		
[6] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014652 0014653		
Amber Rigadin + Anodized Aluminium	LED 3000K LED 2700K	0014650/MA 0014651/MA		
Amber Rigadin + Matte Black Aluminium	LED 3000K LED 2700K	0014652/MA 0014653/MA		

STACKING S 90 V NAKED - INDOOR

David Rockwell, 2023



Discover more.

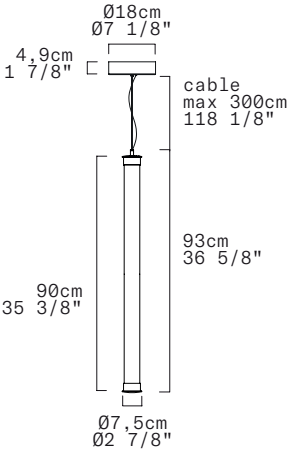

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Polymethacrylate Structure: Aluminum
DIMENSIONS	Diffuser: [Ø2 7/8" H35 3/8"] Ø7,5cm H90cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 21,25W (total) 1930 lm (delivered) 3000K CRI≥90 5 X LED STRIP 21,25W (total) 1891 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	5,73 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)


DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0012505		
	LED 2700K	0012506		

STACKING S 60 V - INDOOR

David Rockwell, 2023



Discover more

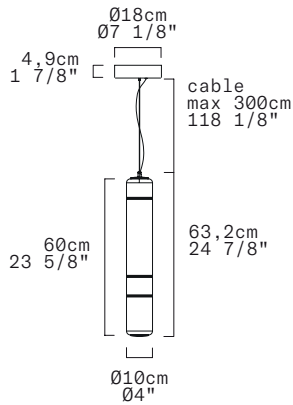

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H23 5/8"] Ø10cm H60cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 13,75W (total) 1218 lm (delivered) 3000K CRI≥90 5 X LED STRIP 13,75W (total) 1186 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	7,05 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0012414 0012415		
Transparent + Matte Black Aluminum	LED 3000K LED 2700K	0013910 0013911		
**Metallic Petrol Blue + Anodized Aluminum	LED 3000K LED 2700K	0013732 0013733		
**Metallic Petrol Blue + Matte Black Aluminum	LED 3000K LED 2700K	0013736 0013737		
**Metallic Titanium + Anodized Aluminum	LED 3000K LED 2700K	0013740 0013741		
**Metallic Titanium + Matte Black Aluminum	LED 3000K LED 2700K	0013744 0013745		


**ON REQUEST: PVD METALIZED TREATMENT
MINIMUM ORDER QUANTITY 4 PCS PER COLOR

STACKING S 60 V RIG - INDOOR

David Rockwell, 2024



Discover more

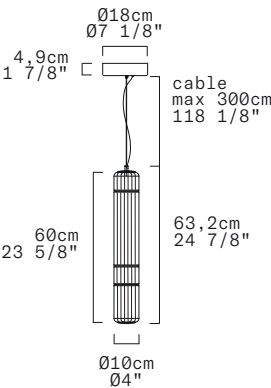

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H23 5/8"] Ø10cm H60cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 13,75W (total) 1218 lm (delivered) 3000K CRI≥90 5 X LED STRIP 13,75W (total) 1186 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	8,60 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS




100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013583 0013584		
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013920 0013921		
Amber Rigadin + Anodized Aluminium	LED 3000K LED 2700K	0013583/RA 0013584/RA		
Amber Rigadin + Matte Black Aluminium	LED 3000K LED 2700K	0013920/RA 0013921/RA		

STACKING S 60 V RIG VU - INDOOR

David Rockwell, 2025

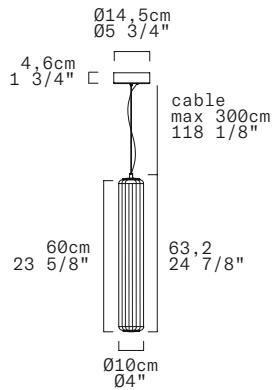

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Rigadin Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" 23 5/8"] Ø10cm H60cm Canopy: [Ø5 3/4" 1 3/4"] Ø14,5cm H4,6cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 13,75W (total) 1218 lm (delivered) 3000K CRI≥90 5 X LED STRIP 13,75W (total) 1186 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION 
NET WEIGHT	7 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

North America

LEUCOS



[3]

100-277Vac 50-60Hz standard version
(supplied with canopy & driver)


DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[3] Trasparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014515 0014516		
[4] Trasparent Rigadin + Matte Black	LED 3000K LED 2700K	0014519 0014520		
Amber Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014515/RA 0014516/RA		
Ambra Rigadin + Matte Black	LED 3000K LED 2700K	0014519/RA 0014520/RA		

<https://www.leucos.com/en-us/>
info.us@leucos.com

Tel +1 (732) 225-0010

STACKING S 60 V MLR - INDOOR

David Rockwell, 2025

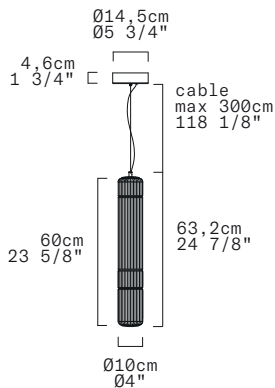

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" 23 5/8"] Ø10cm H60cm Canopy: [Ø5 3/4" 1 3/4"] Ø14,5cm H4,6cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 13,75W (total) 1218 lm (delivered) 3000K CRI≥90 5 X LED STRIP 13,75W (total) 1186 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION 
NET WEIGHT	8,6 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS




[5]

100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[5] Trasparent Millerighe + Anodized Aluminium	LED 3000K LED 2700K	0014654 0014655		
[6] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014656 0014657		
Amber Rigadin + Anodized Aluminium	LED 3000K LED 2700K	0014654/MA 0014655/MA		
Amber Rigadin + Matte Black Aluminium	LED 3000K LED 2700K	0014656/MA 0014657/MA		

STACKING S 60 V MLR VU - INDOOR

David Rockwell, 2025

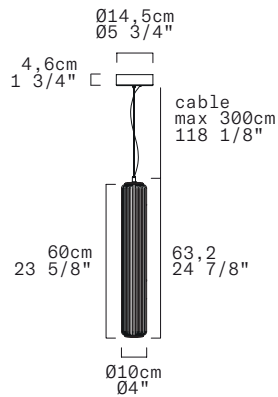

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" 23 5/8"] Ø10cm H60cm Canopy: [Ø5 3/4" 1 3/4"] Ø14,5cm H4,6cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 13,75W (total) 1218 lm (delivered) 3000K CRI≥90 5 X LED STRIP 13,75W (total) 1186 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION 
NET WEIGHT	7 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014517 0014518		
[6] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014521 0014522		
Amber Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014517/MA 0014518/MA		
Amber Millerighe + Matte Black	LED 3000K LED 2700K	0014521/MA 0014522/MA		

<https://www.leucos.com/en-us/>
info.us@leucos.com


Tel +1 (732) 225-0010

STACKING S 60 V NAKED - INDOOR

David Rockwell, 2023



Discover more

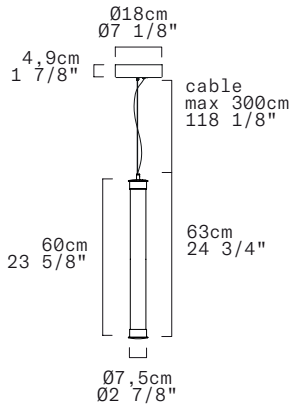

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Polymethacrylate Structure: Aluminum
DIMENSIONS	Diffuser: [Ø2 7/8" H23 5/8"] Ø7,5cm H60cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 13,75W (total) 1236 lm (delivered) 3000K CRI≥90 5 X LED STRIP 13,75W (total) 1211 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	4,40 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)


DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0012507 0012508		

STACKING S 30 V - INDOOR

David Rockwell, 2023



Discover more



REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H11 3/4"] Ø10cm H30cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 6,25W (total) 541 lm (delivered) 3000K CRI≥90 5 X LED STRIP 6,25W (total) 530 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	5,07 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K LED 2700K	0012416 0012417		
Transparent + Matte Black Aluminum	LED 3000K LED 2700K	0013912 0013913		
**Metallic Petrol Blue + Anodized Aluminum	LED 3000K LED 2700K	0013756 0013757		
**Metallic Petrol Blue + Matte Black Aluminum	LED 3000K LED 2700K	0013760 0013761		
**Metallic Titanium + Anodized Aluminum	LED 3000K LED 2700K	0013764 0013765		
**Metallic Titanium + Matte Black Aluminum	LED 3000K LED 2700K	0013768 0013769		


**ON REQUEST: PVD METALIZED TREATMENT
MINIMUM ORDER QUANTITY 8 PCS PER COLOR

STACKING S 30 V RIG - INDOOR

David Rockwell, 2024



Discover more



REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H11 3/4"] Ø10cm H30cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 6,25W (total) 541 lm (delivered) 3000K CRI≥90 5 X LED STRIP 6,25W (total) 530 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	5,60 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS




100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0013587 0013588		
Transparent Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013922 0013923		
Amber Rigadin + Anodized Aluminium	LED 3000K LED 2700K	0013587/RA 0013588/RA		
Amber Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0013922/RA 0013923/RA		

STACKING S 30 V RIG VU - INDOOR

David Rockwell, 2025



REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Rigadin Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H11 3/4"] Ø10cm H30cm Canopy: [Ø5 3/4" H1 3/4"] Ø14,5cm H4,6cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 6,25W (total) 541 lm (delivered) 3000K CRI≥90 5 X LED STRIP 6,25W (total) 530 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION 
NET WEIGHT	6 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)


DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[3] Trasparent Rigadin+ Anodized Aluminum	LED 3000K LED 2700K	0014523 0014524		
[4] Trasparent Rigadin + Matte Black	LED 3000K LED 2700K	0014527 0014528		
Amber Rigadin + Anodized Aluminium	LED 3000K LED 2700K	0014523/RA 0014524/RA		
Amber Rigadin + Matte Black Aluminum	LED 3000K LED 2700K	0014527/RA 0014528/RA		

<https://www.leucos.com/en-us/info.us@leucos.com>

Tel +1 (732) 225-0010

STACKING S 30 V MLR - INDOOR

David Rockwell, 2025

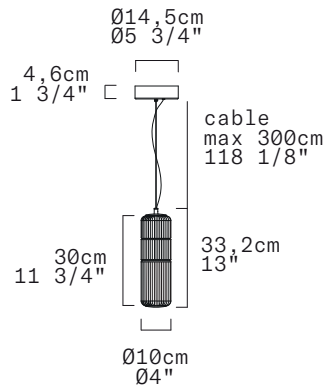

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H11 3/4"] Ø10cm H30cm Canopy: [Ø5 3/4" H1 3/4"] Ø14,5cm H4,6cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 6,25W (total) 541 lm (delivered) 3000K CRI≥90 5 X LED STRIP 6,25W (total) 530 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION
NET WEIGHT	6 lbs 
	Round Cluster Canopy 55 Radial Cluster Canopy 33

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)


DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[5] Trasparent Millerighe + Anodized Aluminium	LED 3000K LED 2700K	0014658 0014659		
[6] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014660 0014661		
Amber Rigadin + Anodized Aluminium	LED 3000K LED 2700K	0014658/MA 0014659/MA		
Amber Rigadin + Matte Black Aluminium	LED 3000K LED 2700K	0014660/MA 0014661/MA		

<https://www.leucos.com/en-us/>
info.us@leucos.com

Tel +1 (732) 225-0010

STACKING S 30 V MLR VU - INDOOR

David Rockwell, 2025



REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H11 3/4"] Ø10cm H30cm Canopy: [Ø5 3/4" H1 3/4"] Ø14,5cm H4,6cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 6,25W (total) 541 lm (delivered) 3000K CRI≥90 5 X LED STRIP 6,25W (total) 530 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION 
NET WEIGHT	6 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014525 0014526		
[6] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014529 0014530		
Amber Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014525/MA 0014526/MA		
Amber Millerighe + Matte Black	LED 3000K LED 2700K	0014529/MA 0014530/MA		

<https://www.leucos.com/en-us/info.us@leucos.com>


Tel +1 (732) 225-0010

STACKING S 30 V NAKED - INDOOR

David Rockwell, 2023



Discover more



REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Polymethacrylate Structure: Aluminum
DIMENSIONS	Diffuser: [Ø2 7/8" H11 3/4"] Ø7,5cm H30cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 6,25W (total) 547 lm (delivered) 3000K CRI≥90 5 X LED STRIP 6,25W (total) 536 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	3,74 lbs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0012509		
	LED 2700K	0012510		