


## AELLA S 30 L - INDOOR

Toso & Massari, 2016

Upgraded

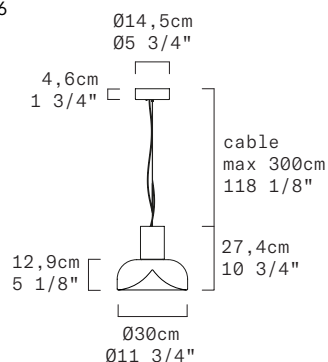

Discover more

REPLACEABLE LED

### TECHNICAL SHEET

|                  |                                                                                                                                                                                                                                                                                                                                                                                                   |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MATERIALS        | Diffuser: Blown Glass<br>Structure: Metal                                                                                                                                                                                                                                                                                                                                                         |
| CANOPY           | Matte White                                                                                                                                                                                                                                                                                                                                                                                       |
| DIMENSIONS       | Diffuser: [Ø11 3/4" H5 1/8"] Ø30 cm H12,9 cm<br>Canopy: [Ø5 3/4" H1 3/4"] Ø14,5 cm H4,6cm<br>Cable lenght: 300 cm [118 1/8"]                                                                                                                                                                                                                                                                      |
|                  | 100-240Vac 50-60Hz                                                                                                                                                                                                                                                                                                                                                                                |
| LIGHT SOURCE     | Transparent with White Spot Diffuser:<br>LED 1 X 11,9W 1051 lm (delivered) 3000K CRI≥90<br>LED 1 X 11,9W 986 lm (delivered) 2700K CRI≥90<br><br>Smoke Grey Diffuser:<br>LED 1 X 11,9W 712 lm (delivered) 3000K CRI≥90<br>LED 1 X 11,9W 668 lm (delivered) 2700K CRI≥90<br><br>All other finishes:<br>LED 1 X 11,9W 1568 lm (nominal) 3000K CRI≥90<br>LED 1 X 11,9W 1506 lm (nominal) 2700K CRI≥90 |
| DIMMING PROTOCOL | Push-dim; 0/1-10V; Dali                                                                                                                                                                                                                                                                                                                                                                           |
| MARKING          | DRY LOCATION                                                                                                                                                                                                                                                                                                   |
| NET WEIGHT       | 8,37 Ibs                                                                                                                                                                                                                                                                                                                                                                                          |

|                |  |
|----------------|--|
| PROJECT NAME   |  |
| SPECIFIER NAME |  |

We reserve the right to change our product specifications.  
Please visit [www.leucos.com](http://www.leucos.com) for the latest product information

North America

LEUCOS



|                                                |                         |                    |     |      |
|------------------------------------------------|-------------------------|--------------------|-----|------|
| DIMMING PROTOCOL                               | Push-dim; 0/1-10V; Dali |                    |     |      |
| FINISH (DIFFUSER + STRUCTURE)                  | SOURCE                  | CODE               | QTY | TYPE |
| [1] Transparent with White Spot + Matte White  | LED 3000K<br>LED 2700K  | 0013051<br>0013052 |     |      |
| [2] Transparent with White Spot + Matte Black  | LED 3000K<br>LED 2700K  | 0013053<br>0013054 |     |      |
| [3] Transparent with White Spot + Matte Bronze | LED 3000K<br>LED 2700K  | 0013055<br>0013056 |     |      |
| [4] Shaded Burgundy + Matte White              | LED 3000K<br>LED 2700K  | 0013057<br>0013058 |     |      |
| [5] Shaded Burgundy + Matte Black              | LED 3000K<br>LED 2700K  | 0013059<br>0013060 |     |      |
| [6] Shaded Burgundy + Matte Bronze             | LED 3000K<br>LED 2700K  | 0013061<br>0013062 |     |      |
| [7] Smoke Grey + Matte White                   | LED 3000K<br>LED 2700K  | 0013063<br>0013064 |     |      |
| [8] Smoke Grey + Matte Black                   | LED 3000K<br>LED 2700K  | 0013065<br>0013066 |     |      |
| [9] Smoke Grey + Matte Bronze                  | LED 3000K<br>LED 2700K  | 0013067<br>0013068 |     |      |

### ON REQUEST

|                                                                   |                         |                                            |     |      |
|-------------------------------------------------------------------|-------------------------|--------------------------------------------|-----|------|
| DIMMING PROTOCOL                                                  | Push-dim; 0/1-10V; Dali |                                            |     |      |
| FINISH                                                            | Source                  | STRUCTURE                                  | QTY | TYPE |
| [10] [11] [12] Transparent "Pulegoso" with metal powder inclusion | LED 3000K<br>LED 2700K  | Matte White<br>Matte Black<br>Matte Bronze |     |      |
| [13] [14] [15] Shaded White                                       | LED 3000K<br>LED 2700K  | Matte White<br>Matte Black<br>Matte Bronze |     |      |
| [16] [17] [18] White Shaded Pink                                  | LED 3000K<br>LED 2700K  | Matte White<br>Matte Black<br>Matte Bronze |     |      |
| [19] [20] [21] Alabaster with brush strikes                       | LED 3000K<br>LED 2700K  | Matte White<br>Matte Black<br>Matte Bronze |     |      |