


# STACKING S 90 V - INDOOR

David Rockwell, 2023



Discover more

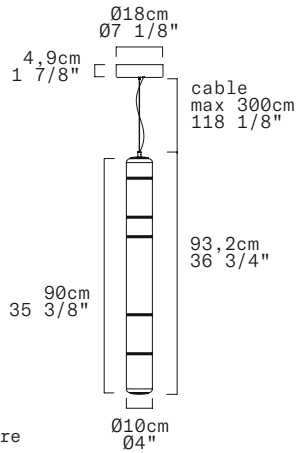

REPLACEABLE LED

## TECHNICAL SHEET

**MATERIALS** Diffuser: Blown Borosilicate Glass  
Structure: Aluminum

**DIMENSIONS** Diffuser: [04" h35 3/8"] Ø10cm H90cm  
Canopy: [07 1/8" H1 7/8"] Ø18cm H4,9cm  
Cable length: [118 1/8"] 300cm

**CANOPY** Matte White

**LIGHT SOURCE** 5 X LED STRIP 21,25W (total) 1895 lm (delivered) 3000K CRI≥90  
5 X LED STRIP 21,25W (total) 1857 lm (delivered) 2700K CRI≥90

**DIMMING PROTOCOL** 0/1-10V; Phase cut


**MARKING** DRY LOCATION



**WEIGHT** Net weight: 9,48 lbs

North America

**LEUCOS**

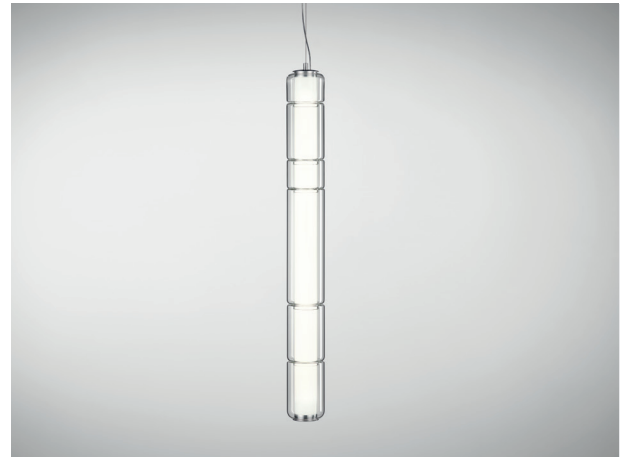

### 100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0012412		
	LED 2700K	0012413		

### 24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0013277		
	LED 2700K	0013278		

<b>PROJECT NAME</b>	
<b>SPECIFIER NAME</b>	

We reserve the right to change our product specifications.  
Please visit [www.leucos.com](http://www.leucos.com) for the latest product information