


STACKING S 60 V NAKED - INDOOR


David Rockwell, 2023

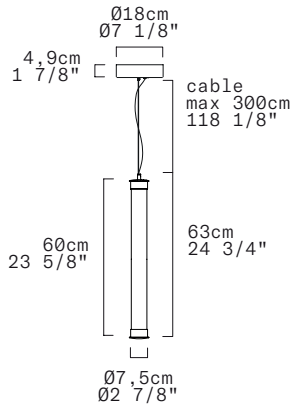

Discover more

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Polymethacrylate Structure: Aluminum
DIMENSIONS	Diffuser: [Ø2 7/8" H23 5/8"] Ø7,5cm H60cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable length: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 13,75W (total) 1236 lm (delivered) 3000K CRI≥90 5 X LED STRIP 13,75W (total) 1211 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
WEIGHT	Net weight: 4,40 Ibs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

11 Mayfield Avenue, Edison, NJ 08837 - USA
Tel +1 (732) 225-0010

<https://www.leucos.com/en-us/info.us@leucos.com>

North America

LEUCOS



100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0012507		
	LED 2700K	0012508		

24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0013389		
	LED 2700K	0013390		