


STACKING S 120 H - INDOOR

David Rockwell, 2023


North America

LEUCOS

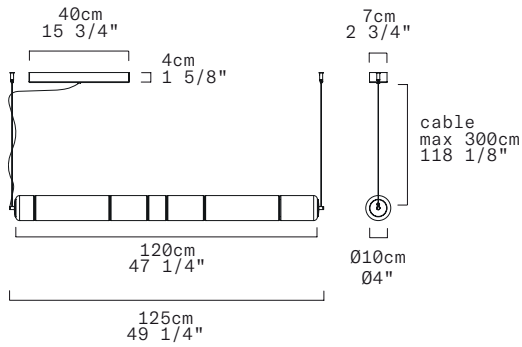

Discover more

REPLACEABLE LED

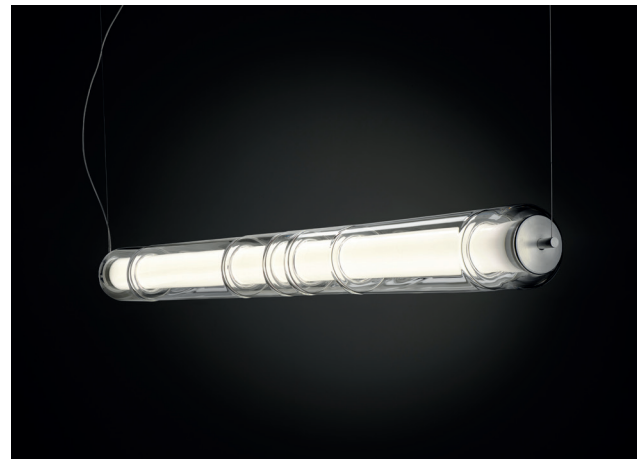

100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0012410		
	LED 2700K	0012411		

24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0013275		
	LED 2700K	0013276		

TECHNICAL SHEET

MATERIALS Diffuser: Blown Borosilicate Glass
Structure: Aluminum

DIMENSIONS Diffuser: [04" L47 1/4"] Ø10cm L120cm
Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm
Cable length: [118 1/8"] 300cm

CANOPY Matte White

LIGHT SOURCE 5 X LED STRIP 28,75W (total) 2523 lm (delivered) 3000K CRI≥90
5 X LED STRIP 28,75W (total) 2472 lm (delivered) 2700K CRI≥90

DIMMING PROTOCOL 0/1-10V; Phase cut

MARKING DRY LOCATION



WEIGHT Net weight: 12,34 Ibs

PROJECT NAME

SPECIFIER NAME

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

11 Mayfield Avenue, Edison, NJ 08837 – USA
Tel +1 (732) 225-0010

<https://www.leucos.com/en-us/info.us@leucos.com>