


STACKING S 120 H NAKED - INDOOR

David Rockwell, 2023

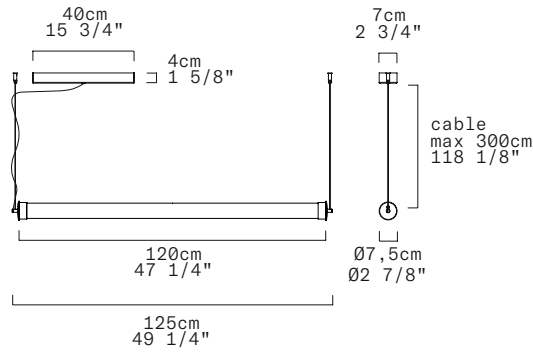

Discover more

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS Diffuser: Polymethacrylate
Structure: Aluminium

DIMENSIONS Diffuser: [Ø2 7/8" L49 1/4"] Ø7,5cm L120cm
Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm
Cable length: [118 1/8"] 300cm

CANOPY Matte White

LIGHT SOURCE 5 X LED STRIP 28,75W (total) 2585 lm (delivered) 3000K CRI≥90
5 X LED STRIP 28,75W (total) 2533 lm (delivered) 2700K CRI≥90

DIMMING PROTOCOL 0/1-10V; Phase cut


MARKING DRY LOCATION



WEIGHT Net weight: 7,49 lbs

North America

LEUCOS

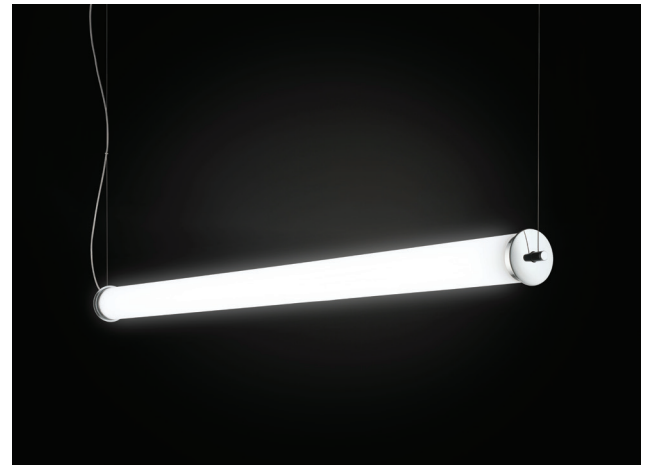

100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0012503		
	LED 2700K	0012504		

24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0013385		
	LED 2700K	0013386		

PROJECT NAME

SPECIFIER NAME

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

11 Mayfield Avenue, Edison, NJ 08837 – USA
Tel +1 (732) 225-0010

<https://www.leucos.com/en-us/info.us@leucos.com>