


AURELIA BOLD S 22 SS (SINGLE SWITCH) - INDOOR

Patrick Jouin, 2021



Direct light +
Indirect light

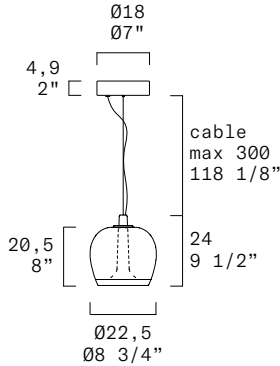

Discover more

REPLACEABLE LED

North America


LEUCOS



110-240Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V; Dali			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[1] Smoke Grey + Matte White	LED 3000K LED 2700K	0013136 0013137		
[2] Smoke Grey + Vintage Brass	LED 3000K LED 2700K	0013138 0013139		
[3] Smoke Grey + Matte Gunmetal	LED 3000K LED 2700K	0013140 0013141		
[4] Shaded Burgundy + Matte White	LED 3000K LED 2700K	0013142 0013143		
[5] Shaded Burgundy + Vintage Brass	LED 3000K LED 2700K	0013144 0013145		
[6] Shaded Burgundy + Matt Gunmetal	LED 3000K LED 2700K	0013146 0013147		
[7] Transparent water effect + Matte White	LED 3000K LED 2700K	0013148 0013149		
[8] Transparent water effect + Vintage Brass	LED 3000K LED 2700K	0013150 0013151		
[9] Transparent water effect + Matte Gunmetal	LED 3000K LED 2700K	0013152 0013153		
[10] Blue water effect + Matte White	LED 3000K LED 2700K	0013154 0013155		
[11] Blue water effect + Vintage Brass	LED 3000K LED 2700K	0013156 0013157		
[12] Blue water effect + Matte Gunmetal	LED 3000K LED 2700K	0013158 0013159		
[13] Transparent pulegoso with metal powder inclusion + Matte White	LED 3000K LED 2700K	0013160 0013161		
[14] Transparent water effect + Vintage Brass	LED 3000K LED 2700K	0013162 0013163		
[15] Transparent pulegoso with metal powder inclusion + Matte Gunmetal	LED 3000K LED 2700K	0013164 0013165		

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Glass Structure: Metal
CANOPY	Matte White
DIMENSIONS	Diffuser: [Ø8 3/4" H8"] Ø22,5 cm H20,5 cm Canopy: [Ø7" H2"] Ø18 cm H4,9cm Cable length: [118 1/8"] 300 cm
LIGHT SOURCE	Smoke Grey Diffuser: Direct: LED 1 X 11,6W Indirect: 1 X LED STRIP 5,8W Total 1298 lm (deliver) 3000K CRI≥90 Total 1247 lm (deliver) 2700K CRI≥90 Transparent Water Effect Diffuser: Direct: LED 1 X 11,6W Indirect: 1 X LED STRIP 5,8W Total 1365 lm (deliver) 3000K CRI≥90 Total 1311 lm (deliver) 2700K CRI≥90 All other finishes: Direct: LED 1 X 11,6W 1531 lm (nominal) 3000K CRI≥90 Indirect: 1 X LED STRIP 5,8W 980 lm (nominal) 3000K CRI≥90 or Direct: LED 1 X 11,6W 1471 lm (nominal) 2700K CRI≥90 Indirect: 1 X LED STRIP 5,8W 944 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V; Dali
MARKING	DRY LOCATION 
NET WEIGHT	7,71 Ibs
ON REQUEST Version for installation with remote driver (supplied without canopy & driver)	
DIMMING PROTOCOL	Driver and canopy not included
PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information