


STACKING S 90 V NAKED - INDOOR

David Rockwell, 2023

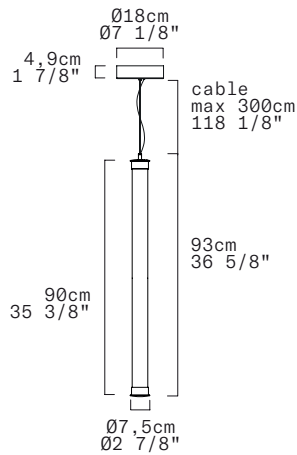

Discover more.

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Polymethacrylate Structure: Aluminum
DIMENSIONS	Diffuser: [Ø2 7/8" H35 3/8"] Ø7,5cm H90cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable length: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 21,25W (total) 1930 lm (delivered) 3000K CRI≥90 5 X LED STRIP 21,25W (total) 1891 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
WEIGHT	Net weight: 5,73 Ibs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0012505		
	LED 2700K	0012506		

24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0013387		
	LED 2700K	0013388		