


STACKING S 180 H NAKED - INDOOR

David Rockwell, 2023

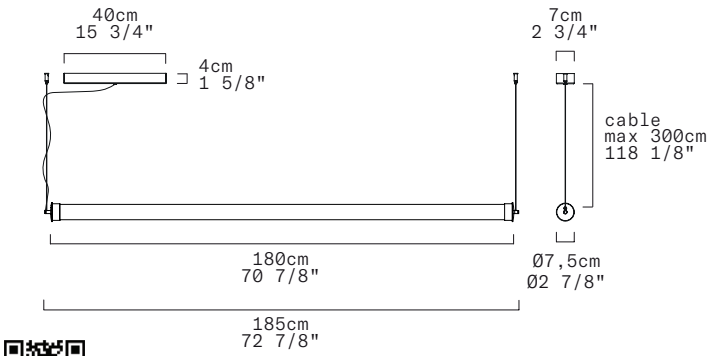


Discover more

REPLACEABLE LED

North America

LEUCOS

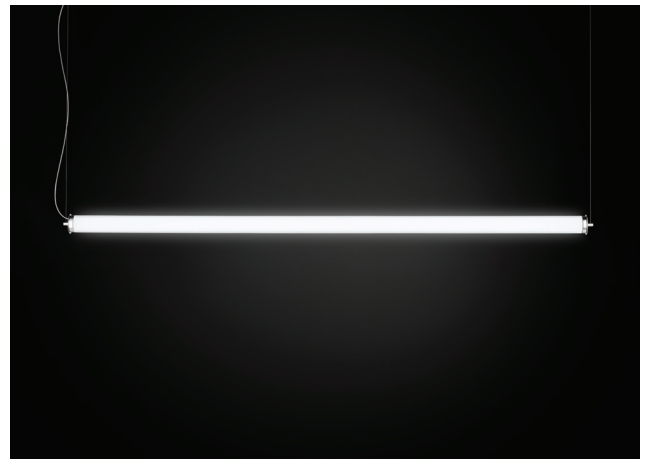

100-277Vac 50-60Hz standard version


(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0012501		
	LED 2700K	0012502		

24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent + Anodized Aluminum	LED 3000K	0013383		
	LED 2700K	0013384		

TECHNICAL SHEET	
MATERIALS	Diffuser: Borosilicate Glass Structure: Aluminium
DIMENSIONS	Diffuser: [2 7/8" L70 7/8"] Ø7,5cm L180cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable length: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 43,75W (total) 3924 lm (delivered) 3000K CRI≥90 5 X LED STRIP 43,75W (total) 3845 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
WEIGHT	Net weight: 11,02 Ibs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information