


AURELIA BOLD S 22 SS (SINGLE SWITCH) - INDOOR

Patrick Jouin, 2021



Direct light +
Indirect light

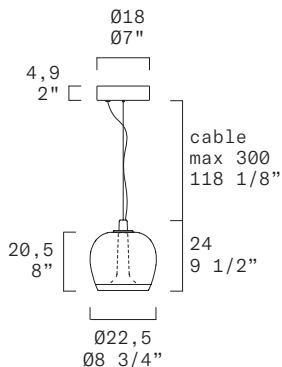

Discover more

REPLACEABLE LED

North America

LEUCOS



[8]

110-240Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V; Dali			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[1] Shaded Burgundy + Matte White	LED 3000K LED 2700K	0013142 0013143		
[2] Shaded Burgundy + Vintage Brass	LED 3000K LED 2700K	0013144 0013145		
[3] Shaded Burgundy + Matte Gunmetal	LED 3000K LED 2700K	0013146 0013147		
[4] Transparent water effect + Matte White	LED 3000K LED 2700K	0013148 0013149		
[5] Transparent water effect + Vintage Brass	LED 3000K LED 2700K	0013150 0013151		
[6] Transparent water effect + Matte Gunmetal	LED 3000K LED 2700K	0013152 0013153		
[7] Transparent pulegoso with metal powder inclusion + Matte White	LED 3000K LED 2700K	0013160 0013161		
[8] Transparent water effect + Vintage Brass	LED 3000K LED 2700K	0013162 0013163		
[9] Transparent pulegoso with metal powder inclusion + Matte Gunmetal	LED 3000K LED 2700K	0013164 0013165		

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Glass Structure: Metal
CANOPY	Matte White
DIMENSIONS	Diffuser: [Ø8 3/4" H8"] Ø22,5 cm H20,5 cm Canopy: [Ø7" H2"] Ø18 cm H4,9cm Cable lenght: [118 1/8"] 300 cm
LIGHT SOURCE	Transparent Water Effect Diffuser: Direct: LED 1 X 11,6W Indirect: 1 X LED STRIP 5,8W Total 1365 lm (deliver) 3000K CRI≥90 Total 1311 lm (deliver) 2700K CRI≥90 All other finishes: Direct: LED 1 X 11,6W 1531 lm (nominal) 3000K CRI≥90 Indirect: 1 X LED STRIP 5,8W 980 lm (nominal) 3000K CRI≥90 or Direct: LED 1 X 11,6W 1471 lm (nominal) 2700K CRI≥90 Indirect: 1 X LED STRIP 5,8W 944 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V; Dali
MARKING	DRY LOCATION 
NET WEIGHT	7,71 Ibs

ON REQUEST

Version for installation with remote driver
(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included
------------------	-----------------------------------

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

<https://www.leucos.com/en-us/>
info.us@leucos.com

Tel +1 (732) 225-0010