


STACKING S 60 V RIG - INDOOR


David Rockwell, 2024

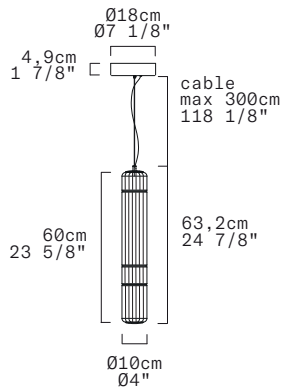

Discover more

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H23 5/8"] Ø10cm H60cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable length: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 13,75W (total) 1218 lm (delivered) 3000K CRI≥90 5 X LED STRIP 13,75W (total) 1186 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	8,60 Ibs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version

(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013583		
	LED 2700K	0013584		
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013920		
	LED 2700K	0013921		
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013802		
	LED 2700K	0013803		
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013806		
	LED 2700K	0013807		

24Vdc version installation with remote driver

(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013585		
	LED 2700K	0013586		
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013810		
	LED 2700K	0013811		
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013804		
	LED 2700K	0013805		
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013808		
	LED 2700K	0013809		