


STACKING S 90 V RIG - INDOOR

David Rockwell, 2024



Discover more

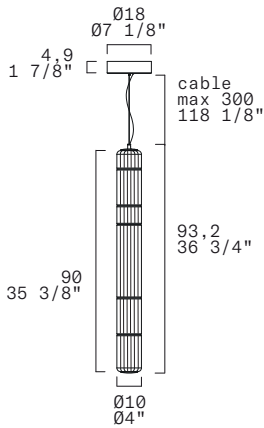

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" h35 3/8"] Ø10cm H90cm Canopy: [Ø7 1/8" H1 7/8"] Ø18cm H4,9cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte White
LIGHT SOURCE	5 X LED STRIP 21,25W (total) 1895 lm (delivered) 3000K CRI≥90 5 X LED STRIP 21,25W (total) 1857 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V; Phase cut
MARKING	DRY LOCATION 
NET WEIGHT	11,90 Ibs

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V; Phase cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013579		
	LED 2700K	0013580		
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013918		
	LED 2700K	0013919		

24Vdc version installation with remote driver
(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013581		
	LED 2700K	0013582		
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013800		
	LED 2700K	0013801		