


STACKING P-PL 60

David Rockwell, 2025

North America

LEUCOS

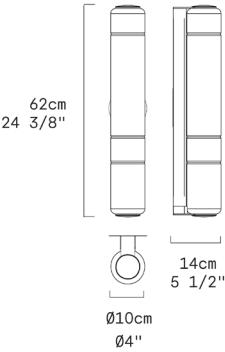

TECHNICAL SHEET	
MATERIALS	Diffuser: Smooth Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H24 3/8"] Ø10cm H62cm Depth: [5 1/2"] 14cm
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION 
NET WEIGHT	6,6 lbs
NOTE	Can be installed vertically and horizontally



DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[1] Trasparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014135 0014134		
[2] Trasparent Rigadin + Matte Black	LED 3000K LED 2700K	0014137 0014136		

ON REQUEST (PVD: METALIZED TREATMENT)

MINIMUM ORDER QUANTITY 4 PCS PER COLOR

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[3] Metallic Petrol Blue + Anodized Aluminum	LED 3000K LED 2700K	0014256 0014257		
[4] Metallic Petrol Blue + Matte Black	LED 3000K LED 2700K	0014258 0014259		
[5] Metallic Titanium + Anodized Aluminum	LED 3000K LED 2700K	0014260 0014261		
[6] Metallic Titanium + Matte Black	LED 3000K LED 2700K	0014262 0014263		

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information