


STACKING P-PL 60 MLR

David Rockwell, 2025

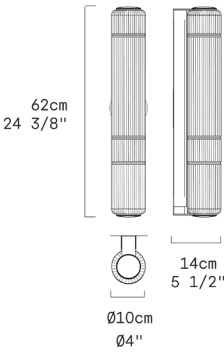


TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" H24 3/8"] Ø10cm H62cm Depth: [5 1/2"] 14cm
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION 
NET WEIGHT	6.85 lbs
NOTE	Can be installed vertically and horizontally

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS

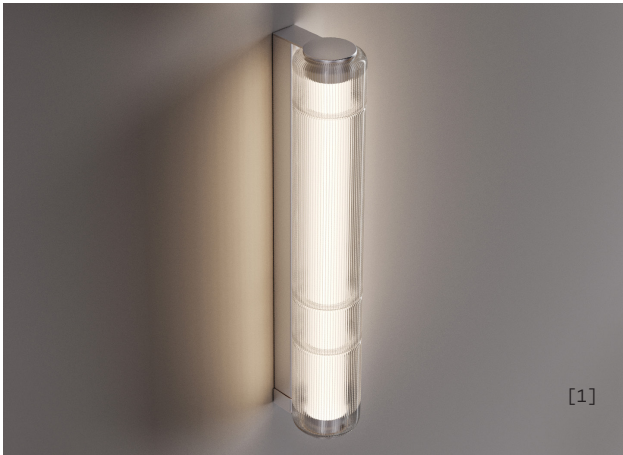

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[1] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014147 0014146		
[2] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014149 0014148		