


STACKING S 120 H MLR - INDOOR

David Rockwell, 2025

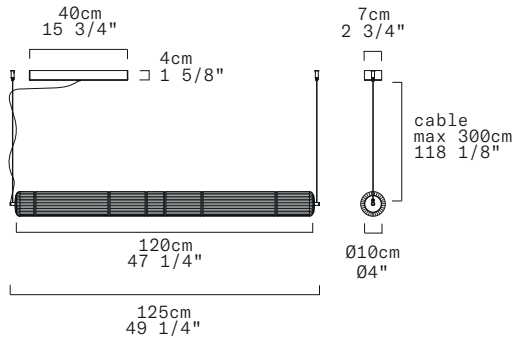

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [04" 47 1/4"] Ø10cm L120cm Canopy: [15 3/4" x 2 3/4" x H1 5/8"] 40cm x 7cm x H4cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 28,75W (total) 2523 lm (delivered) 3000K CRI≥90 5 X LED STRIP 28,75W (total) 2472 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION 
NET WEIGHT	15,7 lbs
ACCESSORIES	Radial Cluster Canopy 33


PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

HQ: 6 Kilmer Rd Suite B - Edison, NJ 08817, US
WH: 2351 Us Highway 130 Ste B - Dayton, NJ 08810-1648, US

North America

LEUCOS

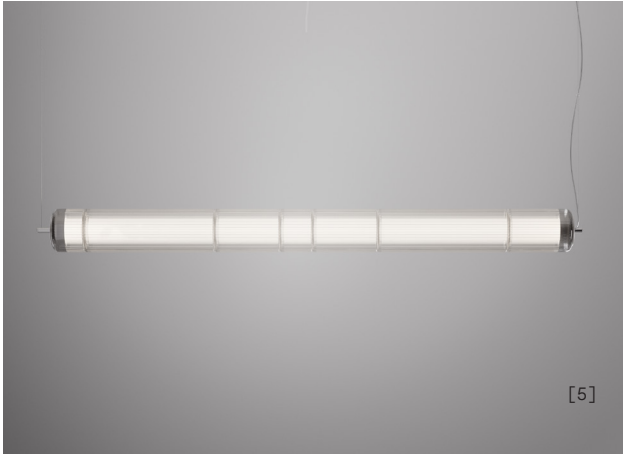

100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014666 0014667		
[6] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014668 0014669		

24Vdc version installation with remote driver
(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014646 0014647		
[6] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014648 0014649		

<https://www.leucos.com/en-us/>
info.us@leucos.com

Tel +1 (732) 225-0010