


STACKING S 60 V MLR - INDOOR

David Rockwell, 2025

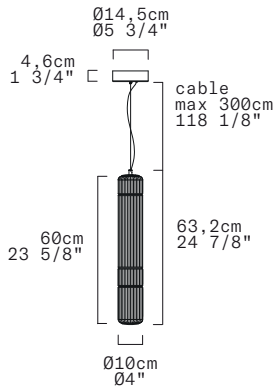

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Millerighe Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [Ø4" 23 5/8"] Ø10cm H60cm Canopy: [Ø5 3/4" 1 3/4"] Ø14,5cm H4,6cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 13,75W (total) 1218 lm (delivered) 3000K CRI≥90 5 X LED STRIP 13,75W (total) 1186 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION 
NET WEIGHT	8,6 lbs
ACCESSORIES	Round Cluster Canopy 55 Radial Cluster Canopy 33

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014654 0014655		
[6] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014656 0014657		

24Vdc version installation with remote driver
(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[5] Trasparent Millerighe + Anodized Aluminum	LED 3000K LED 2700K	0014634 0014635		
[6] Trasparent Millerighe + Matte Black	LED 3000K LED 2700K	0014636 0014637		