


STACKING S 60 V RIG VU - INDOOR

David Rockwell, 2025

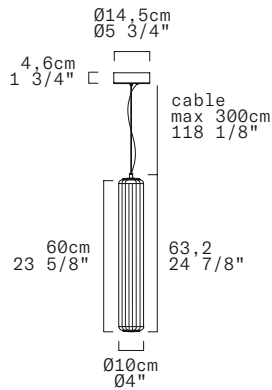

REPLACEABLE LED

TECHNICAL SHEET	
MATERIALS	Diffuser: Rigadin Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: [04" 23 5/8"] Ø10cm H60cm Canopy: [05 3/4" 1 3/4"] Ø14,5cm H4,6cm Cable lenght: [118 1/8"] 300cm
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 13,75W (total) 1218 lm (delivered) 3000K CRI≥90 5 X LED STRIP 13,75W (total) 1186 lm (delivered) 2700K CRI≥90
DIMMING PROTOCOL	0/1-10V, Phase Cut
MARKING	DRY LOCATION 
NET WEIGHT	7 lbs
ACCESSORIES	Round Cluster Canopy 55 Radial Cluster Canopy 33

PROJECT NAME	
SPECIFIER NAME	

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information

North America

LEUCOS



100-277Vac 50-60Hz standard version
(supplied with canopy & driver)

DIMMING PROTOCOL	0/1-10V, Phase Cut			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[3] Trasparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014515 0014516		
[4] Trasparent Rigadin + Matte Black	LED 3000K LED 2700K	0014519 0014520		

24Vdc version installation with remote driver
(supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included			
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE	QTY	TYPE
[3] Trasparent Rigadin + Anodized Aluminum	LED 3000K LED 2700K	0014539 0014540		
[4] Trasparent Rigadin + Matte Black	LED 3000K LED 2700K	0014543 0014544		