



BLOCK P14

L E U C O S

INSTALLATION INSTRUCTIONS

BLOCK P14-P29



BLOCK P29

A1 Allegato Enclosed



One installer



Save instructions

Revised
24-10-2011

USA

WARNING: - DISCONNECT POWER BEFORE INSTALLATION. FOLLOW DIRECTIONS CAREFULLY TO AVOID SCRATCHING THE GLASS DIFFUSER


1. ILL. 1. Install the structure "A" on the to the Junction Box through the holes "X" as shown.
2. ILL. 2. Make electrical connections to supply wires. Take care to respect the correct polarity.
3. ILL. 2. Place the bulb into lamphoder and make a working ceck.
4. ILL. 2. Place the "V" containment glasses by pushing inside the metal clips as show.
5. ILL. 3/4. Install the diffuser onto the back structure by guiding the four pins "P" inside the four side slots. Push down moderately the diffuser till upper pins "P" clamp inside the two side clips "D".
6. Restore power.

BLOCK P14 - Halogen MAX 1X60W G9 120V

BLOCK P29 - Halogen MAX 2X60W G9 120V

BLOCK P29 - Fluor. MAX 1X18W G24q2 120/277V Type Quad Tube

FOR U.S.A. MARKET ONLY



MOUNTS TO STANDARD JUNCTION BOX

CIRCUIT DIAGRAM:

WHITE NEUTRAL


BLACK PHASE

GREEN-YELLOW Ground
BARE COPPER WIRE


For additional information please contact your local dealer
or **LEUCOS U.S.A.** at: Tel. (732) 225-0010 Fax. (732) 225-0250
www.leucos.com - info@leucosusa.com

LEUCOS S.p.A. - Via delle Industrie 16/b - 30030 SALZANO (VE) ITALIA- Tel. 041 5859111 - Fax. 041 447598
www.leucos.it - e-mail info@leucos.it


ILL.1

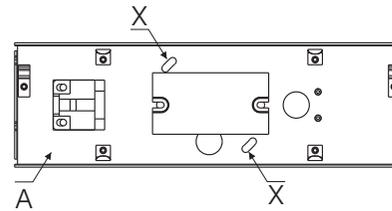

ILL.2

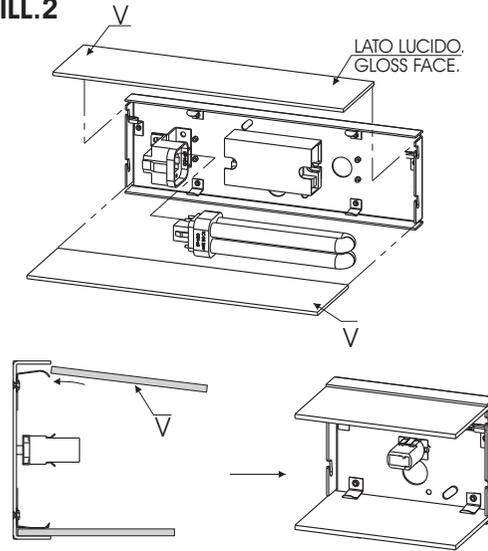

ILL.3

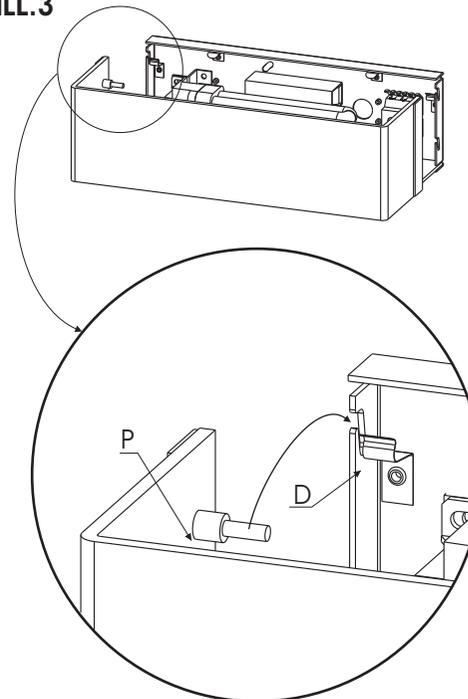

ILL.4

