


SPRING S

rev. 0

Design: Eva Zeisel

Codice: E26: 0703363015252 cromo/bianco
0703363015352 cromo/ambra
0703363165252 nichel/bianco
0703363165352 nichel/ambra
0703363365252 bianco/bianco
0703363365352 bianco/ambra
0703363505252 bronzo/bianco
0703363505352 bronzo/ambra

GU24: 0703363015288 cromo/bianco
0703363015388 cromo/ambra
0703363165288 nichel/bianco
0703363165388 nichel/ambra
0703363365288 bianco/bianco
0703363365388 bianco/ambra
0703363505288 bronzo/bianco
0703363505388 bronzo/ambra

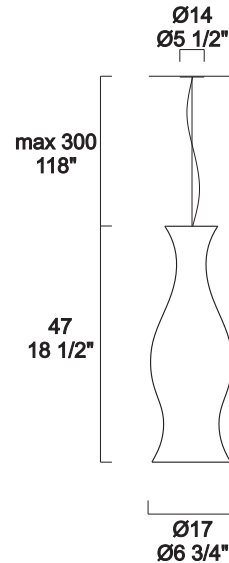


WARNING:


- DISCONNECT POWER BEFORE STARTING INSTALLATION OF FIXTURE.
- INSTALL IN ACCORDANCE WITH THE NATIONAL AND LOCAL CODES.
- FOLLOW DIRECTIONS CAREFULLY TO AVOID SCRATCHING THE GLASS DIFFUSER.

TECHNICAL DATA


1 X MAX 75W
E26 TYPE A
120V / 60Hz



1 X MAX 18W
TYPE GU24 SBCFL
120V / 60Hz



LOCATION



INSTALLATION INSTRUCTIONS

LEUCOS®


SPRING S Suspension

Designed by: Eva Zeisel

LEUCOS USA
11 Mayfield Avenue
Edison, NJ 08837 USA
Phone (732) 225-0010 Fax (732) 225-0250
info@leucosusa.com
www.leucosusa.com



FOLLOW THE ASSEMBLY INSTRUCTIONS BY READING THE NUMERICAL PROGRESSION.

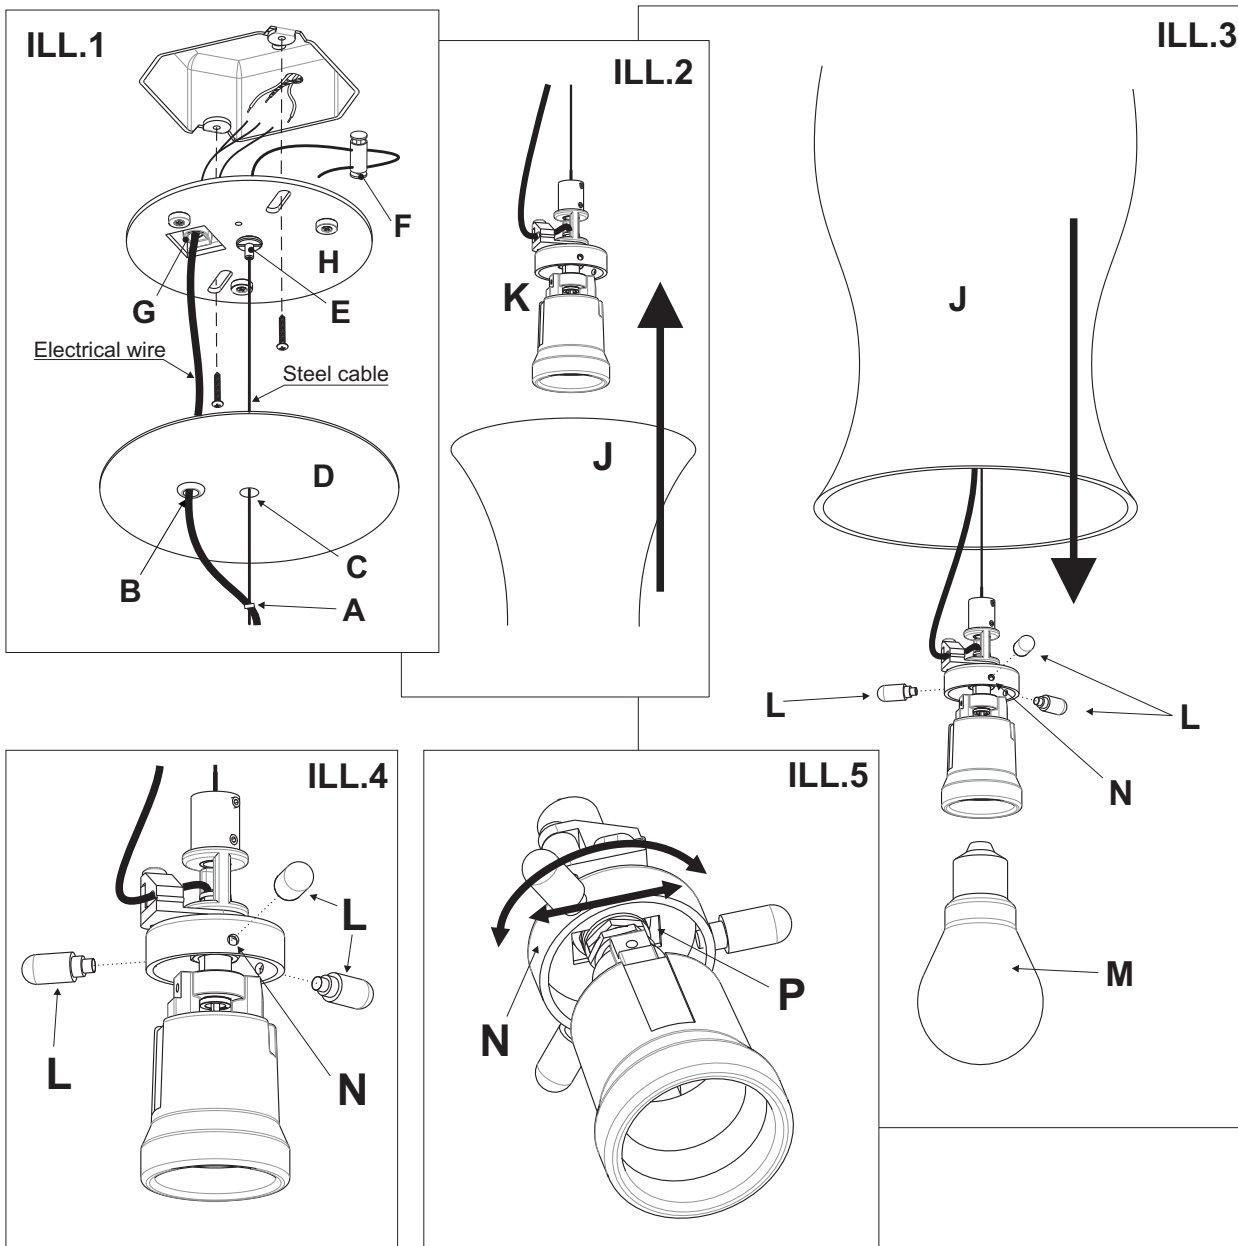

INSTALLATION INSTRUCTIONS

- ILL.1.** Guide the electrical wire through the rubber rings "A" and through the side opening "B".
- Guide the steel cable through the center opening "C" of the cover "D".
- Slightly loosen the fitting "E". Pass the steel cable through the central hole of the fitting "E". The fitting is pressured fit. In order to secure the steel cable push the fitting toward the top. Having determined the correct height of the fixture, secure the steel cable by securing the fitting "E". In order to properly secure the steel cable, we suggest passing the steel cable through fitting "F" at the end of the steel cable.
- Guide the electrical wires through the plastic clamp "G" then lock it with the plastic screw.
- Connect the fixture's electrical wires to supply wire connectors of the proper size leaving excess wire for decorative "swag" below canopy "D".
- Install plate "H" to the J-Box.
- Slide the canopy "D" against the J-Box cover. This will secure without any screws since plate is magnetic.
- ILL.2.** Guide the glass diffuser "J" so that the structure "K" enter through the top opening of the diffuser.
- ILL.3 and ILL.4.** Secure the three pins "L" in the three holes of the disk "N".
- Install the lamp "M" into lampholder.
- Restore power.
- ILL.5:** PLEASE NOTE: IN ORDER TO BALANCE THE GLASS DIFFUSER, ROTATE THE DISK "N" IN THE SLOT "P".

La sicurezza di questo apparecchio e' garantita solo con l'uso appropriato di queste istruzioni pertanto e' necessario conservarle.

The safety and reliability are guaranteed only when installation instructions are properly followed. Please retain this instruction sheet for future reference.

La securite de cet appareil n'est pas garantie en cas de non-respect de ces instructions, qu'il est necessaire de conserver.

Für die Sicherheit des Beleuchtungskörpers kann nur unter der Voraussetzung garantiert werden, daß die vorliegenden Anleitungen korrekt beachtet werden.

La seguridad del aparato se garantiza sólo utilizando de forma apropiada las siguientes instrucciones, por lo tanto es necesario conservarlas.