


# STACKING S 180 H - INDOOR


David Rockwell, 2023



# LEUCOS

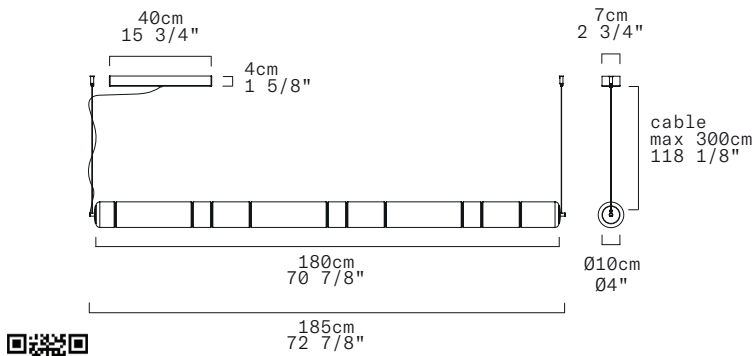

Discover more

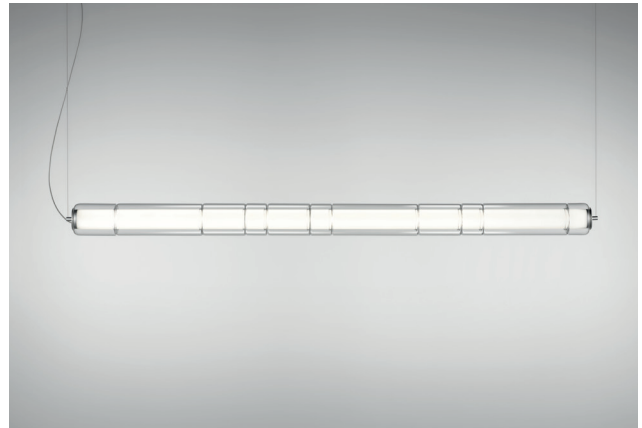REPLACEABLE LED



TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm L180cm [Ø4" 70 7/8"] Canopy: 40cm x 7cm x H4cm [15 3/4" x 2 3/4" x H1 5/8"] Cable lenght: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 43,75W (total) 5031 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 43,75W (total) 4812 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	DRY LOCATION  
WEIGHT	Net weight: 10kg

## ⊕ Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent + Anodized Aluminium	LED 3000K	0012296
	LED 2700K	0012380

## ⊕ Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent + Anodized Aluminium	LED 3000K	0013255
	LED 2700K	0013256

We reserve the right to change our product specifications.  
Please visit [www.leucos.com](http://www.leucos.com) for the latest product information