


STACKING S 90 V - INDOOR

David Rockwell, 2023

LEUCOS



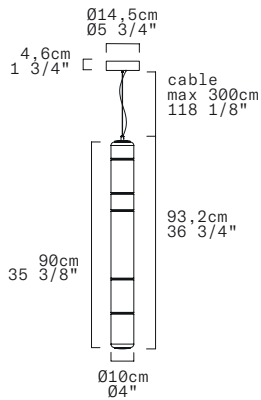

Discover more

REPLACEABLE LED



TECHNICAL SHEET

MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum	
DIMENSIONS	Diffuser: Ø10cm H90cm [Ø4" 35 3/8"] Canopy: Ø14,5cm H4,6cm [Ø5 3/4" H1 3/4"] Cable length: 300cm [118 1/8"]	
CANOPY	Matte white	
LIGHT SOURCE	5 X LED STRIP 24V 21,25W (total) 2443 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 21,25W (total) 2337 lm (nominal) 2700K CRI≥90	
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
MARKING	DRY LOCATION  	
WEIGHT	Net weight: 4,3kg	

Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent + Anodized Aluminum	LED 3000K	0012363
	LED 2700K	0012386

Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent + Anodized Aluminum	LED 3000K	0013261
	LED 2700K	0013262

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information