


**STACKING S 90 V - INDOOR**

David Rockwell, 2023

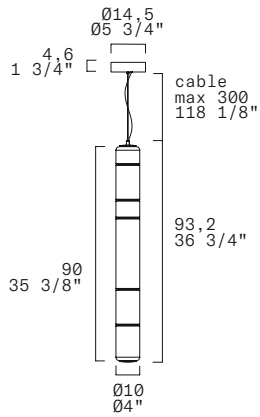



REPLACEABLE LED

**LEUCOS**

Discover more



## TECHNICAL SHEET

MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminium
DIMENSIONS	Diffuser: $\varnothing 10\text{cm}$ H90cm [ $\varnothing 4$ " 35 3/8"] Canopy: $\varnothing 14,5\text{cm}$ H4,6cm [ $\varnothing 5 \frac{3}{4}$ " H1 3/4"] Cable lenght: 300cm [ $118 \frac{1}{8}$ "]
FINISHES (DIFFUSER + STRUCTURE)	Transparent + Anodized Aluminium 
LIGHT SOURCE	5 X LED STRIP 24V 21,25W (total) 2443 lm (nominal) 3000K CRI $\geq$ 90 5 X LED STRIP 24V 21,25W (total) 2337 lm (nominal) 2700K CRI $\geq$ 90
CONTROL	Push-dim; 0/1-10V, DALI
MARKING	DRY LOCATION   
ON REQUEST	Customized structure colors



CONTROL	Push-dim; 0/1-10V, DALI		
FINISH	SOURCE	CODE	GTIN (EAN CODE)
Transparent + Anodized Aluminium	LED 3000K LED 2700K	0012363 0012386	

Detail

Custom color



We reserve the right to change our product specifications. Please visit [www.leucos.com](http://www.leucos.com) for the latest product information