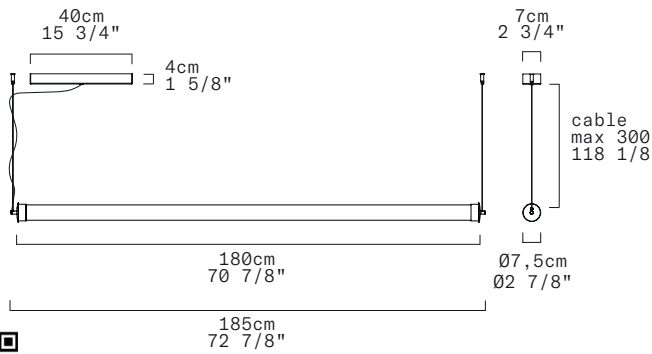


STACKING S 180 H NAKED - INDOOR

David Rockwell, 2023

LEUCOS





Discover more

REPLACEABLE LED



TECHNICAL SHEET

MATERIALS	Diffuser: Borosilicate Glass Structure: Aluminum	
DIMENSIONS	Diffuser: Ø7,5cm L180cm [Ø2 7/8" L70 7/8"] Canopy: 40cm x 7cm x H4cm [15 3/4" x 2 3/4" x H1 5/8"] Cable lenght: 300cm [118 1/8"]	
CANOPY	Matte white	
LIGHT SOURCE	5 X LED STRIP 24V 43,75W (total) 5031 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 43,75W (total) 4812 lm (nominal) 2700K CRI≥90	
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
MARKING	DRY LOCATION  	
WEIGHT	Net weight: 5kg	

Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
White + Anodized Aluminum	LED 3000K	0012431
	LED 2700K	0012432

Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
White + Anodized Aluminum	LED 3000K	0013265
	LED 2700K	0013266

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information