


STACKING S 90 V RIG - INDOOR

David Rockwell, 2024

LEUCOS



Discover more

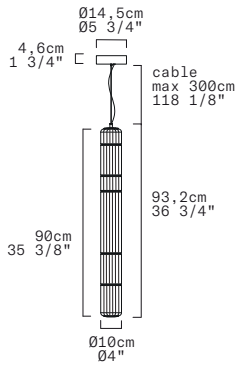

REPLACEABLE LED

| TECHNICAL SHEET  |                                                                                                                                    |
|------------------|------------------------------------------------------------------------------------------------------------------------------------|
| MATERIALS        | Diffuser: Blown Borosilicate Glass<br>Structure: Aluminum                                                                          |
| DIMENSIONS       | Diffuser: Ø10cm H90cm [Ø4" 35 3/8"]<br>Canopy: Ø14,5cm H4,6cm [Ø5 3/4" H1 3/4"]<br>Cable lenght: 300cm [118 1/8"]                  |
| CANOPY           | Matte white                                                                                                                        |
| LIGHT SOURCE     | 5 X LED STRIP 24V 21,25W (total) 2443 lm (nominal) 3000K CRI≥90<br>5 X LED STRIP 24V 21,25W (total) 2337 lm (nominal) 2700K CRI≥90 |
| DIMMING PROTOCOL | Push-dim; 0/1-10V, DALI                                                                                                            |
| MARKING          | CE IP20                                                                                                                            |
| NET WEIGHT       | 5,4kg                                                                                                                              |



| Standard version (supplied with canopy & driver)                                   |                                |         |
|------------------------------------------------------------------------------------|--------------------------------|---------|
| DIMMING PROTOCOL                                                                   | Push-dim; 0/1-10V, DALI        |         |
| FINISH (DIFFUSER + STRUCTURE)                                                      | SOURCE                         | CODE    |
| Transparent Rigadin + Anodized Aluminum                                            | LED 3000K                      | 0013549 |
|                                                                                    | LED 2700K                      | 0013550 |
| Transparent Rigadin + Matte Black Aluminum                                         | LED 3000K                      | 0013878 |
|                                                                                    | LED 2700K                      | 0013879 |
| Class 3 version installation with remote driver (supplied without canopy & driver) |                                |         |
| DIMMING PROTOCOL                                                                   | Driver and canopy not included |         |
| FINISH (DIFFUSER + STRUCTURE)                                                      | SOURCE                         | CODE    |
| Transparent Rigadin + Anodized Aluminum                                            | LED 3000K                      | 0013551 |
|                                                                                    | LED 2700K                      | 0013552 |
| Transparent Rigadin + Matte Black Aluminum                                         | LED 3000K                      | 0013800 |
|                                                                                    | LED 2700K                      | 0013801 |

We reserve the right to change our product specifications.  
Please visit [www.leucos.com](http://www.leucos.com) for the latest product information