


STACKING S 30 V RIG - INDOOR

David Rockwell, 2024

LEUCOS

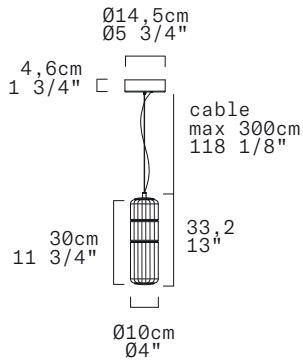

Discover more

REPLACEABLE LED

TECHNICAL SHEET

MATERIALS Diffuser: Blown Borosilicate Glass
Structure: Aluminum

DIMENSIONS Diffuser: $\varnothing 10\text{cm}$ H 30cm [$\varnothing 4''$ H $11\ 3/4''$]
Canopy: $\varnothing 14,5\text{cm}$ H $4,6\text{cm}$ [$\varnothing 5\ 3/4''$ H $1\ 3/4''$]
Cable length: 300cm [$118\ 1/8''$]

CANOPY Matte white

LIGHT SOURCE 5 X LED STRIP 24V 6,25W (total) 718 lm (nominal) 3000K CRI \geq 90
5 X LED STRIP 24V 6,25W (total) 687 lm (nominal) 2700K CRI \geq 90

DIMMING PROTOCOL Push-dim; 0/1-10V, DALI

MARKING  

NET WEIGHT 2,7 kg



Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013557
	LED 2700K	0013558

Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013559
	LED 2700K	0013560

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information