


# STACKING S 90 V RIG - INDOOR

David Rockwell, 2024

LEUCOS

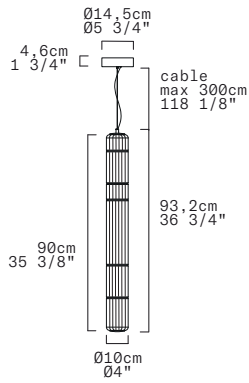

Discover more

REPLACEABLE LED

## TECHNICAL SHEET

**MATERIALS** Diffuser: Blown Borosilicate Glass  
Structure: Aluminum

**DIMENSIONS** Diffuser: Ø10cm H90cm [Ø4" 35 3/8"]  
Canopy: Ø14,5cm H4,6cm [Ø5 3/4" H1 3/4"]  
Cable lenght: 300cm [118 1/8"]

**CANOPY** Matte white

**LIGHT SOURCE** 5 X LED STRIP 24V 21,25W (total) 2443 lm (nominal) 3000K CRI≥90  
5 X LED STRIP 24V 21,25W (total) 2337 lm (nominal) 2700K CRI≥90

**DIMMING PROTOCOL** Push-dim; 0/1-10V, DALI

**MARKING**  

**NET WEIGHT** 5,5 kg



### Standard version (supplied with canopy & driver)

|   |                         |         |
|---|-------------------------|---------|
| DIMMING PROTOCOL                        | Push-dim; 0/1-10V, DALI |         |
| FINISH (DIFFUSER + STRUCTURE)           | SOURCE                  | CODE    |
| Transparent Rigadin + Anodized Aluminum | LED 3000K               | 0013549 |
|   | LED 2700K               | 0013550 |

### Class 3 version installation with remote driver (supplied without canopy & driver)

|   |                                |         |
|---|--------------------------------|---------|
| DIMMING PROTOCOL                        | Driver and canopy not included |         |
| FINISH (DIFFUSER + STRUCTURE)           | SOURCE                         | CODE    |
| Transparent Rigadin + Anodized Aluminum | LED 3000K                      | 0013551 |
|   | LED 2700K                      | 0013552 |

We reserve the right to change our product specifications.  
Please visit [www.leucos.com](http://www.leucos.com) for the latest product information