


STACKING S 60 V RIG - INDOOR

David Rockwell, 2024



LEUCOS

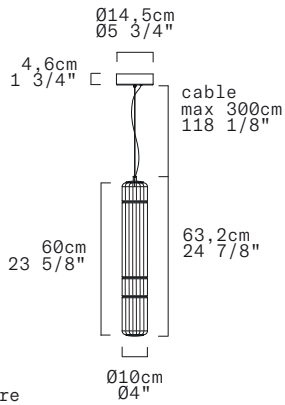

Discover more

REPLACEABLE LED



TECHNICAL SHEET	
MATERIALS	Diffuser: Blown Borosilicate Glass Structure: Aluminum
DIMENSIONS	Diffuser: Ø10cm H60cm [Ø4" 23 5/8"] Canopy: Ø14,5cm H4,6cm [Ø5 3/4" 1 3/4"] Cable length: 300cm [118 1/8"]
CANOPY	Matte white
LIGHT SOURCE	5 X LED STRIP 24V 13,75W (total) 1581 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 13,75W (total) 1512 lm (nominal) 2700K CRI≥90
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI
MARKING	 
NET WEIGHT	3,9kg

⊕ Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013553
	LED 2700K	0013554
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013880
	LED 2700K	0013881
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013854
	LED 2700K	0013855
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013856
	LED 2700K	0013857

⊖ Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
Transparent Rigadin + Anodized Aluminum	LED 3000K	0013555
	LED 2700K	0013556
Transparent Rigadin + Matte Black Aluminum	LED 3000K	0013810
	LED 2700K	0013811
Tobacco Rigadin + Anodized Aluminum	LED 3000K	0013804
	LED 2700K	0013805
Tobacco Rigadin + Matte Black Aluminum	LED 3000K	0013808
	LED 2700K	0013809

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information